

VELA UNIFORM PROGRAM STERLING EVENT

DISTRIBUTION STATEMENT A
Approved for Public Release
Distribution Unlimited

PRESHOT AND POSTSHOT SAFETY SURVEY OF OIL AND GAS FACILITIES BAXTERVILLE FIELD, MISSISSIPPI

Issued: April 30, 1968

U. S. Bureau of Mines
Bartlesville, Oklahoma

Reproduced From
Best Available Copy

20011022 105

LEGAL NOTICE

This report was prepared as an account of Government sponsored work. Neither the United States, nor the Commission, nor any person acting on behalf of the Commission:

A. Makes any warranty or representation, expressed or implied, with respect to the accuracy, completeness, or usefulness of the information contained in this report, or that the use of any information, apparatus, method, or process disclosed in this report may not infringe privately owned rights; or

B. Assumes any liabilities with respect to the use of, or for damages resulting from the use of any information, apparatus, method, or process disclosed in this report.

As used in the above, "person acting on behalf of the Commission" includes any employee or contractor of the Commission, or employee of such contractor, to the extent that such employee or contractor of the Commission, or employee of such contractor prepares, disseminates, or provides access to, any information pursuant to his employment or contract with the Commission, or his employment with such contractor.

This report has been reproduced directly from the best available copy.

Printed in USA. Price \$3.00. Available from the Clearinghouse for Federal Scientific and Technical Information, National Bureau of Standards, U. S. Department of Commerce, Springfield, Virginia 22151.

VUF-1041

NUCLEAR EXPLOSIONS-PEACEFUL
APPLICATIONS (TID-4500)

PRESHOT AND POSTSHOT SAFETY SURVEY
OF OIL AND GAS FACILITIES
BAXTERVILLE FIELD, MISSISSIPPI
STERLING EVENT

Don C. Ward
Bureau of Mines
U. S. Department of the Interior
Bartlesville Petroleum Research Center
Bartlesville, Oklahoma

January 1967

TABLE OF CONTENTS

	<u>Page</u>
I. INTRODUCTION	5
1.1 Authority.	5
1.2 Purpose and Scope.	5
1.3 Summary.	5
1.4 Background	5
II. SURVEY	7
2.1 Preshot.	7
2.2 Postshot	8
III. OBSERVATIONS	8
IV. CONCLUSIONS.	9
REFERENCES	10
APPENDIX	
A. Maps.	11
B. General Notes	15
C. Photograph Notes.	21
D. Photographs	27

PRESHOT AND POSTSHOT SAFETY SURVEY OF OIL AND
GAS FACILITIES - BAXTERVILLE FIELD, MISSISSIPPI

STERLING EVENT

I. INTRODUCTION

1.1 Authority

The survey was conducted in accordance with the Operational Safety Plan for the Sterling Event, dated November 1966.

1.2 Purpose and Scope

Oil and gas wells and related facilities of the Baxterville field were surveyed to document any physical changes resulting from the Sterling Event. All such structures within a 5-mile radius of Ground Zero (GZ) were examined and photographed in detail. Other selected wells and facilities within a 6-mile radius of GZ were examined and photographed.

1.3 No damage was observed at any of the oil or gas wells or related facilities. Notes and photographic documentation are contained in the appendixes.

1.4 Background

Previous investigation (references 1 and 2) by the U.S. Bureau of Mines (USBM) included a preliminary survey of oil and gas wells and associated facilities of the industry

that lie within 10 miles of the proposed test site at the Tatum Dome, Lamar County, Mississippi. Figure 1 of Appendix A shows locations of such wells and facilities within 5- and 10-mile radii of GZ.

Many test wells were drilled within this area, but only in the Baxterville field have oil and gas been produced in commercial quantities. Figure 2 of Appendix A shows location, status, and ownership of all wells within the Baxterville field. Gulf Oil Corporation is the major operator of the field. On the shot date (December 3, 1966), 147 wells were producing oil from the Lower Tuscaloosa Formation at depths ranging from 8,600 to 8,900 feet. Thirty-three wells were producing gas, two from the Wilcox Formation at a depth of about 5,100 feet and thirty-one from the Upper Tuscaloosa Formation at depths between 7,614 and 7,970 feet. Daily production from the Baxterville field is approximately 15,000 barrels of oil and 25 million cubic feet of gas.

Five gas pipelines, three oil pipelines, and one liquefied petroleum products line cross the area. (See Appendix A.) A dehydration plant (6 miles from GZ), operated by the United Gas Company of Shreveport, Louisiana, and having a daily capacity of about 200 million cubic feet of gas, delivers dry gas to three of the company's pipelines.

The nearest productive well is 4.7 miles from Sterling GZ. The nearest petroleum facility is a 16-inch gas pipeline that passes within 2.8 miles of GZ. Based on predicted peak ground motions and experience from the Salmon Event (reference 3), USBM concluded that no damage to these facilities could be expected.

II. SURVEY

2.1 Preshot

Because of the many and varied structures and facilities (derricks, pumping units, wellhead connections, tank batteries, gathering lines, etc.) within the Baxterville field and in view of only the remote possibility of damage, a detailed survey of the entire field was deemed impractical.

All oil and gas structures within a 5-mile radius of GZ were examined and photographed in detail, but only selected facilities and installations beyond the 5-mile radius were surveyed.

The preshot survey was initiated 12 days before the detonation, November 21, 1966. The above-mentioned facilities were inspected, and photographs were taken to provide documentation of any physical changes.

Representatives of the producing and pipeline companies of the Baxterville area were advised of the scheduled date for detonation and the degree of ground shock that was expected.

2.2 Postshot

The postshot survey began immediately after the detonation at 6:15 a.m., December 3, 1966. The same facilities as documented in the preshot survey were examined and photographed.

Representative samples of the photographs appear in Appendix D. Additional photographs (a total of 330 were taken) are on file at the USBM Bartlesville Petroleum Research Center, Bartlesville, Oklahoma.

The preshot and postshot surveys were performed by personnel of USBM: Don C. Ward, petroleum engineer, and Duel J. Sears, photographic technician.

III. OBSERVATIONS

No damage was observed by either on-the-spot inspection or examination of photographs.

No damage was reported by the producing or pipeline companies.

IV. CONCLUSIONS

The preshot and postshot survey indicated that no damage occurred to any oil or gas well or related facility. Maximum values of ground shock were many times below those values at which structural damage to oilfield construction would be anticipated.

It is concluded that, for future projects, no damage would result to similar structures from comparable yields at comparable ranges. Also, it is concluded that the survey procedures were adequate to accomplish the survey objectives.

REFERENCES

1. Riggs, C. H., and Don C. Ward; Oil and Gas Wells and Associated Facilities in the Tatum Dome Area, Lamar County, Mississippi; U.S. Bureau of Mines--Special Report to AEC, January 1963.
2. Ward, Don C., and C. H. Atkinson; Report of Initial Review of Possible Damage to Petroleum Reservoirs in the Vicinity of the Salmon Nuclear Test Event, Project Dribble; U.S. Bureau of Mines--Special Report to AEC, June 12, 1963.
3. Ward, Don C.; Preshot and Postshot Safety Survey of Oil and Gas Facilities--Baxterville Field, Mississippi; Vela Uniform Program--Project Dribble - Salmon Event - VUF-1022, Final Report; U.S. Atomic Energy Commission Division of Technical Information Extension, Oak Ridge, Tennessee, January 1965.

APPENDIX A

Maps



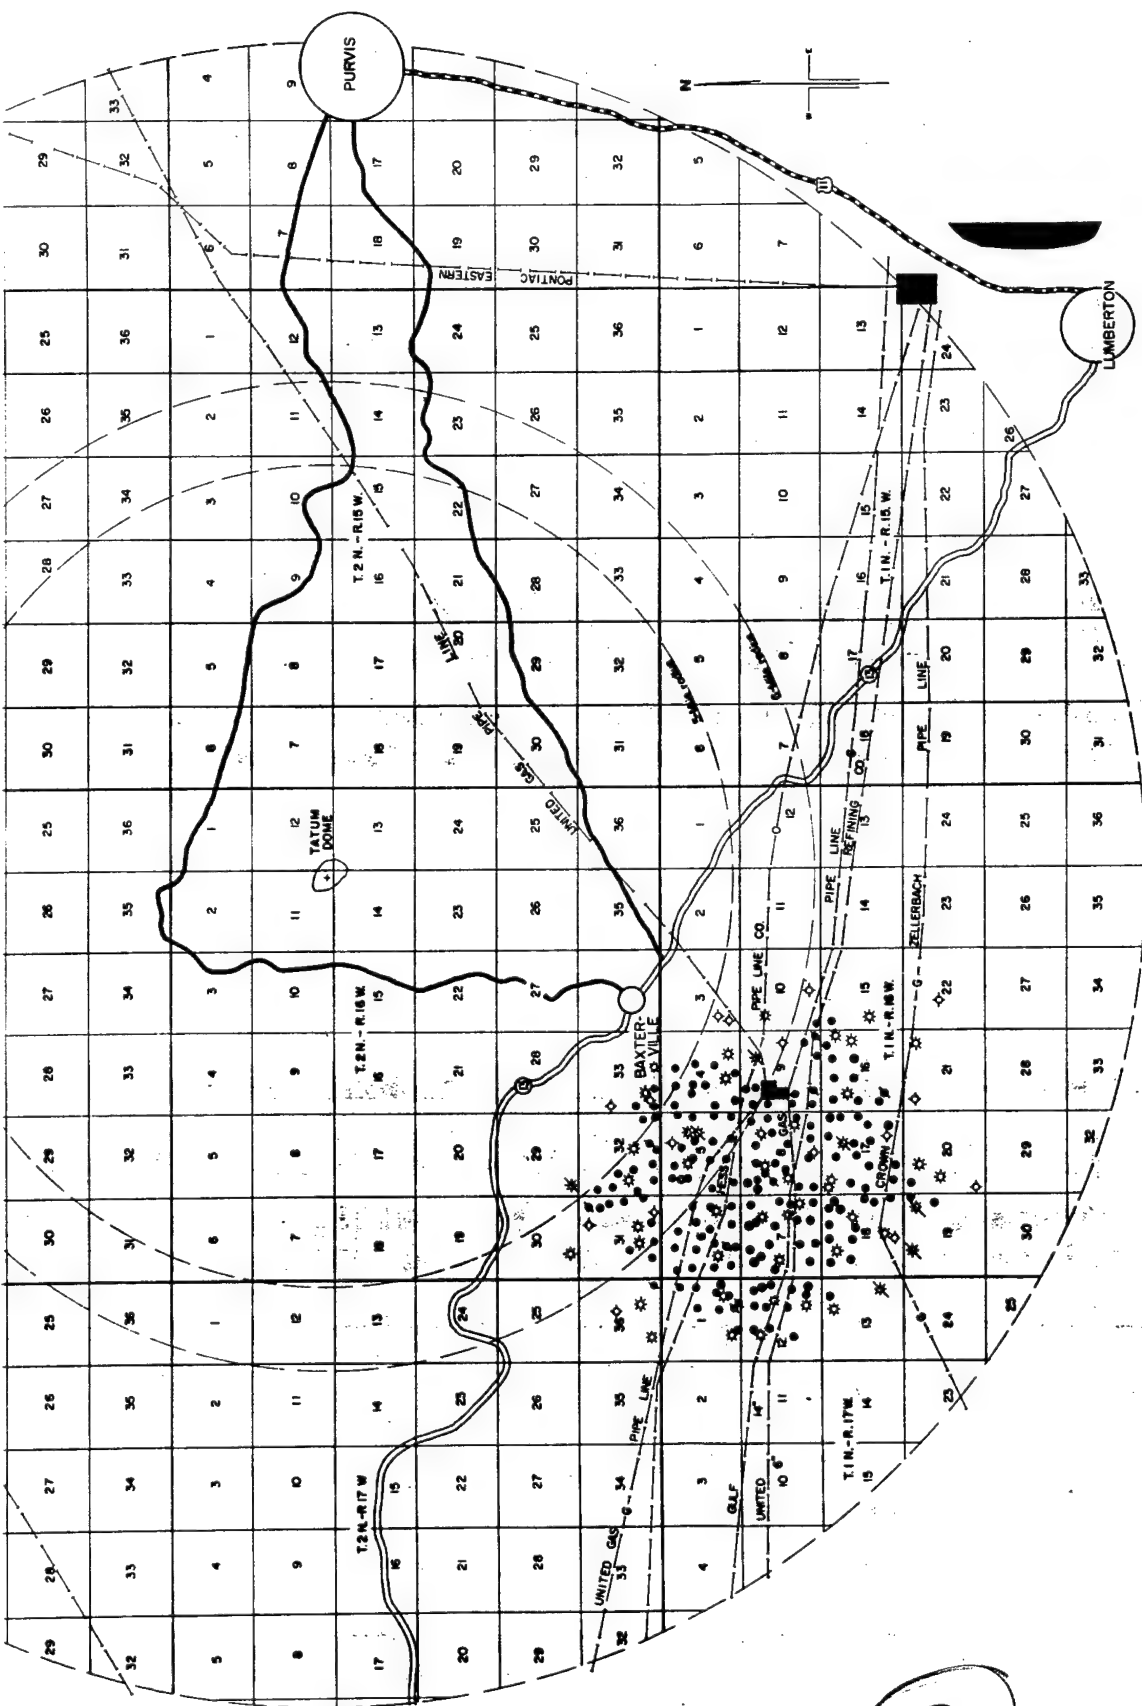


Fig. 1 Oil and Gas Facilities within 10 miles of Sterling Event

2

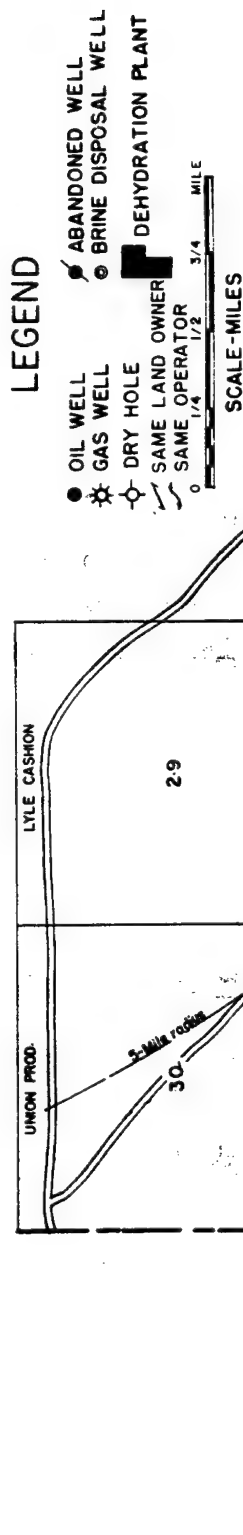

T. 2 N.

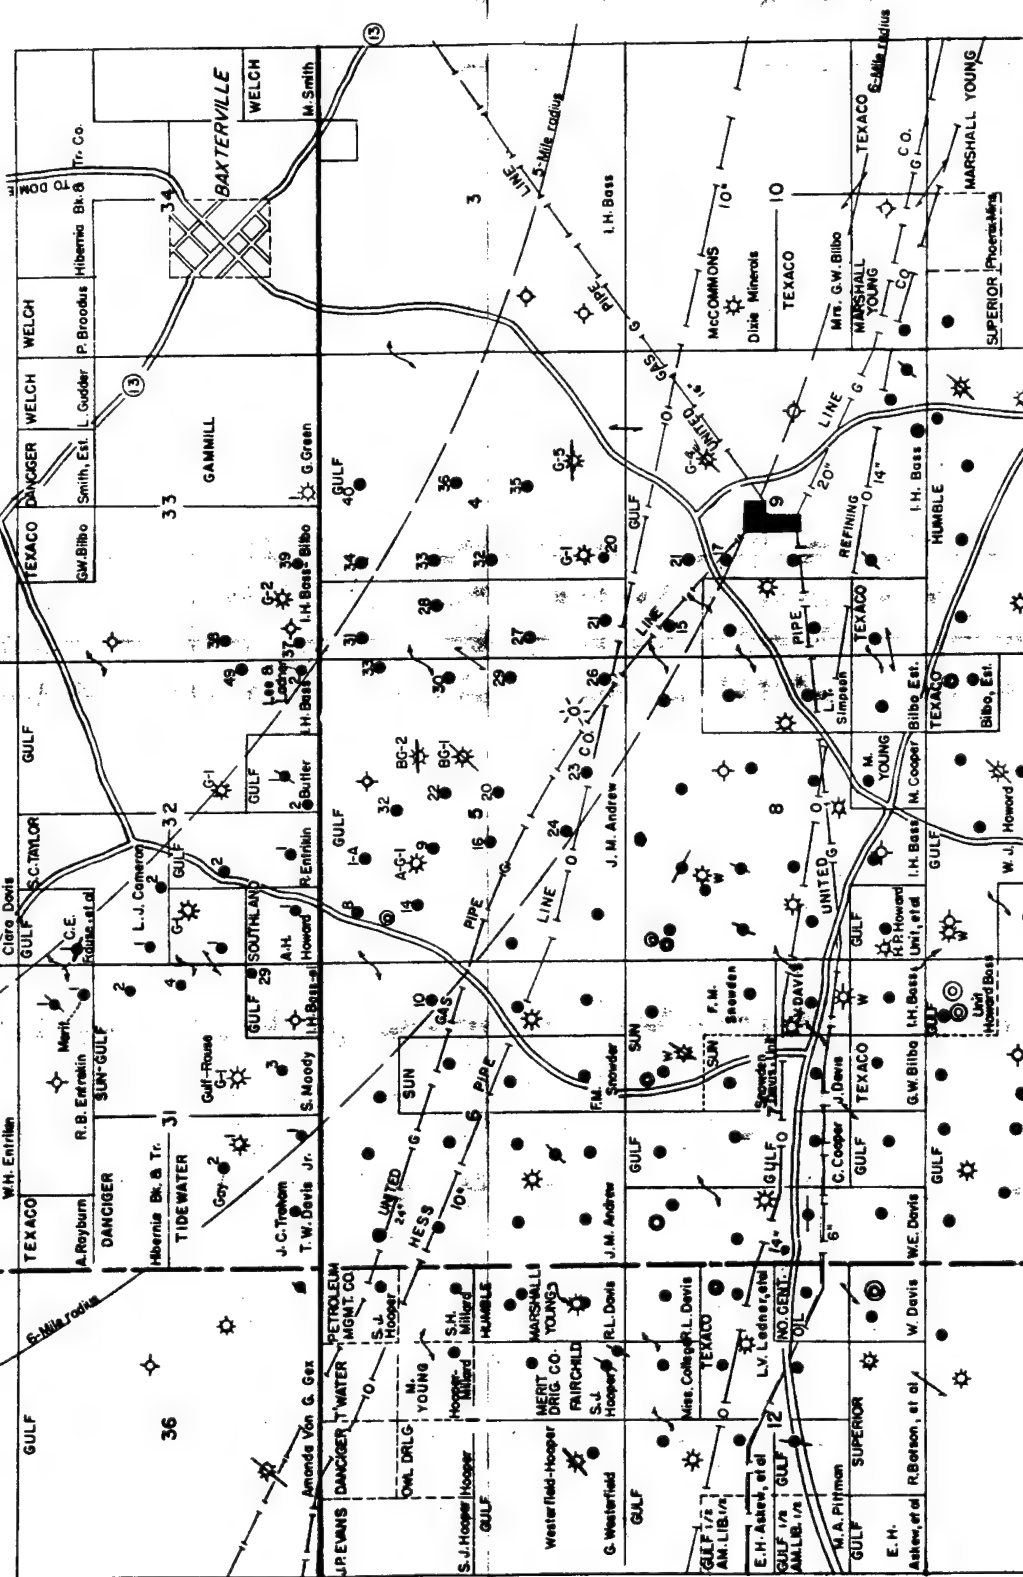

T. 1 N.

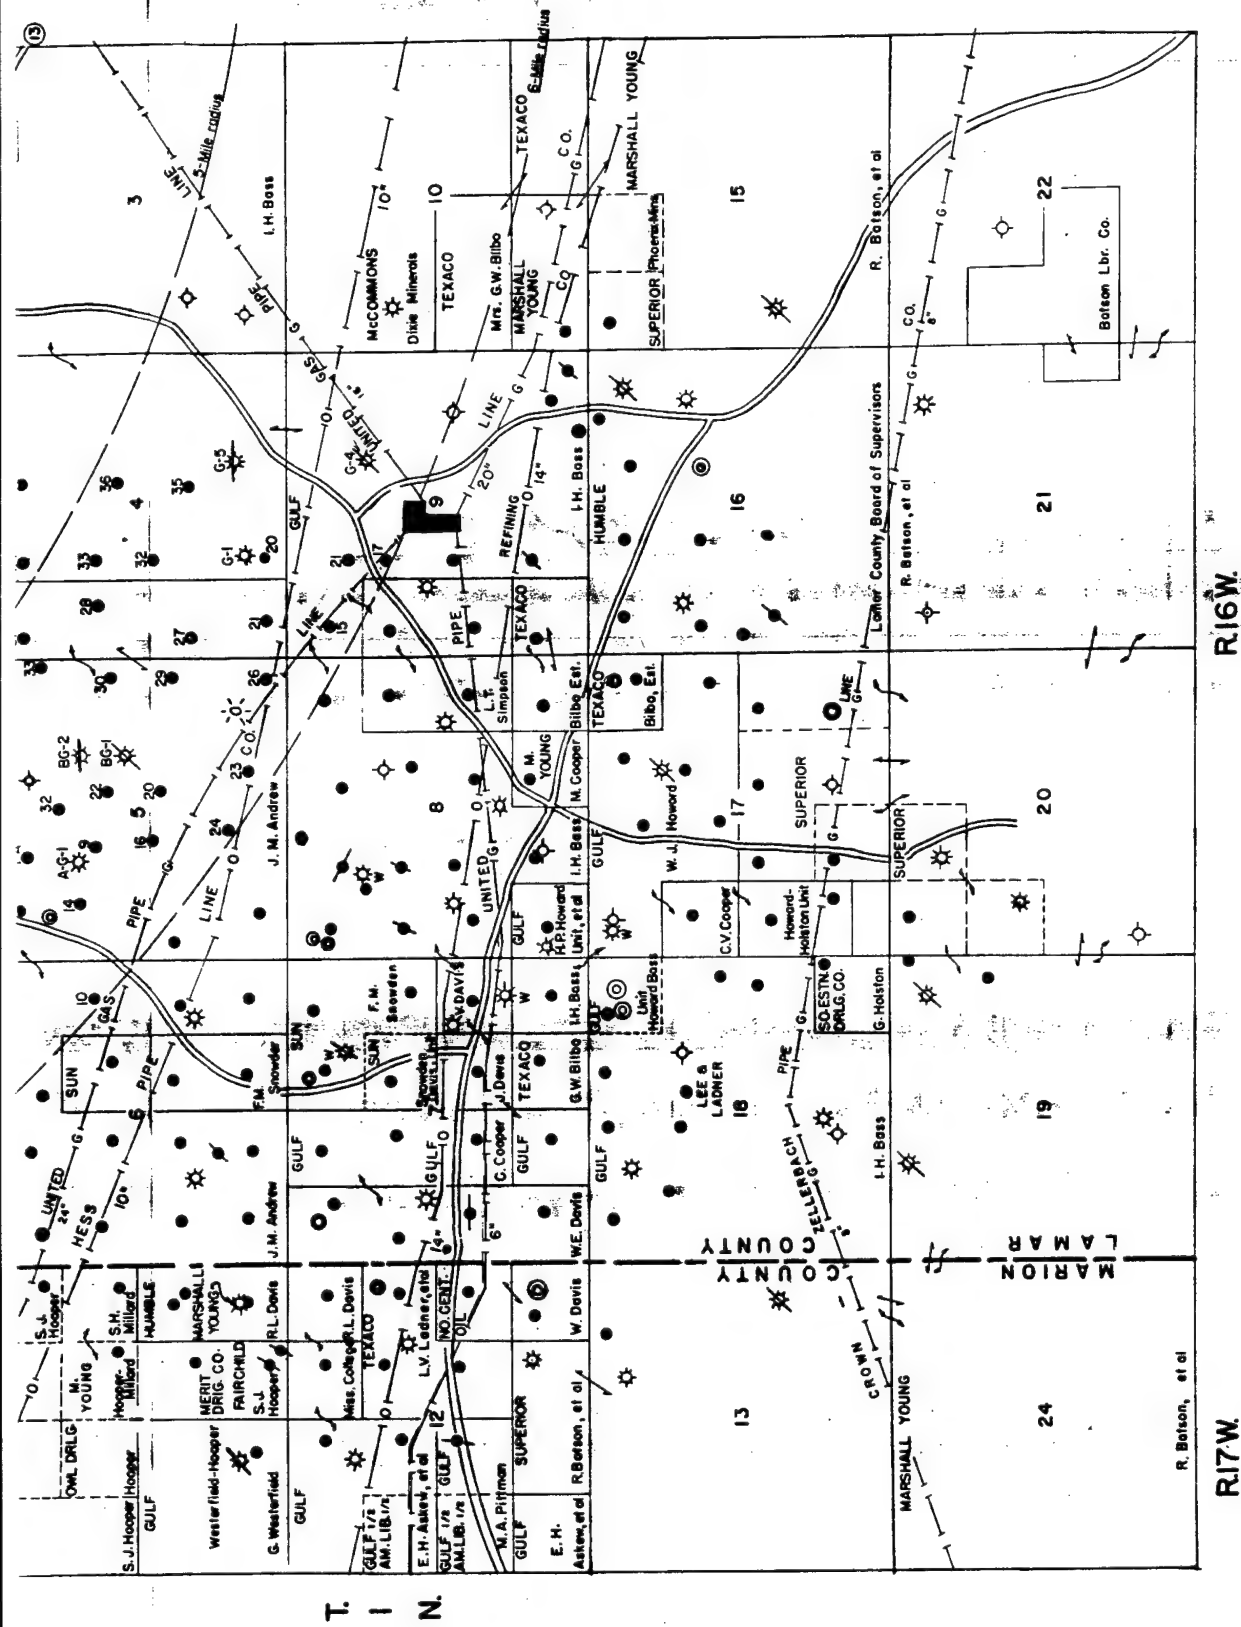


Fig. 2 Baxterville Oilfield, Lamar and Marion Counties, Mississippi

2

APPENDIX B

General Notes

APPENDIX B

General Notes

Equipment and construction associated with the Baxterville field were designed for permanent usage and contain safety factors in excess of 2. The function of these heavy-duty installations is the transportation and confinement under pressure of produced fluids. Thorough maintenance is provided to assure that all facilities remain in good working condition.

Empirical threshold values of shock wave acceleration or velocity for damage to residential-type construction are far less than those which would cause structural damage to oil and gas wells or associated facilities.

Oil Wells

Oil wells in the Baxterville field were completed with 600 to 1,600 feet of surface casing (predominantly 10-3/4-inch) cemented to the surface, 5-1/2-inch or 7-inch production casing cemented to a minimum of 2,000 feet above the base of the casing, and 2-1/2-inch or 2-7/8-inch tubing suspended from the wellhead. These wells (except a few that flow naturally) are pumped by individually powered 320,000-pound beam units set on concrete foundation piers, the bases of which extend a minimum of 14 inches below ground surface. All but two of the 96-foot service derricks that were standing over approximately 50 wells at the time of the Salmon detonation have been removed. The corners of these derricks are set on 5-foot-square cement blocks that extend 24 inches into solid earth.

Gas Wells

Gas wells were completed with a minimum of 500 feet of surface casing cemented to the surface and either a 4-1/2-inch, 5-1/2-inch, or 7-inch production casing cemented to at least 1,700 feet above the base of the casing. In many wells, production packers were run on the tubing. Wellhead equipment consists of a casinghead, a master gate, and a composite manifold.

Brine Disposal Systems

The brine disposal systems include settling tanks, pumps, line pipe, and disposal wells. Most disposal wells were completed with from 200 to 300 feet of surface casing and about 2,500 feet of 5-1/2-inch casing. Cement-lined pipes, 4 to 8 inches in diameter, are buried near the surface and connect the settling and brine-storage tanks to the disposal wells.

Lease Batteries

Each oil lease is equipped with from one to eight heater-treaters and has from two to ten stock tanks that range in capacity from 150 to 1,000 barrels each. Tanks, heaters, separators, etc. are of welded-steel construction set on either concrete or steel-ring foundations. Gathering lines from wells to tank batteries range in size from 2-1/2 to 4 inches in diameter; 90 percent of these lines are covered. Feeder pipelines from tank batteries to the main pipeline are 6 inches in diameter and are buried at a depth of about 18 inches. Associated with each gas lease are a separator, compressor, and distillate tanks.

Pipelines

The nine oil and gas transmission lines in the area range in diameter from 6 to 24 inches. These lines are buried 2 to 3 feet below the ground surface and are exposed only at terminal or booster stations. Normal operating pressures are from 500 to 1,000 psi.

APPENDIX C

Photograph Notes

APPENDIX C

Photograph Notes

Preshot and postshot photographs shown in Appendix D are representative of all photographs taken. No damage was detected by either visual observation or photographic documentation. Locations of photographed wells and facilities may be determined from the field map in Appendix A.

Plates 1 through 5: 4.7 miles from GZ--Gammill Green 1--SW SW SE of Section 33

Plate 1: Gas wellhead.

Plate 2: Oil and gas separator.

Plate 3: Oil-storage tanks.

Plate 4: Concrete blocks supporting flow line.

Plate 5: BS plate and valve on oil-storage tank.

Plates 6 and 7: 4.8 miles from GZ--Gulf Bass 40--NW NW NE of Section 4

Plate 6: Individually powered beam pumping unit.

Plate 7: Flow line from wellhead.

Plate 8: 4.9 miles from GZ--Gulf Bass 34--NW NE NW of Section 4

Crack in concrete foundation of pumping unit.

Plates 9 and 10: 4.8 miles from GZ--Gulf Bass 39--SW SE SW of Section 33

Plate 9: Individually powered beam pumping unit.

Plate 10: Motor bracket and skids.

Plate 11: 4.8 miles from GZ--Gulf Bass-Bilbo G2--E $\frac{1}{2}$ SW SW of Section 33

Gas wellhead.

Plates 12 through 16: 4.8 miles from GZ--Gulf Bass 49--SE NE SE of Section 32

Plate 12: Individually powered and hydraulic-lift pumping units.

Plate 13: Motor bracket and skids.

Plate 14: Volume tank for hydraulic-lift pump.

Plate 15: Electric motor on pumping unit.

Plate 16: Valve canister on hydraulic-lift pump.

Plate 17: 4.7 miles from GZ--Gulf Bass 38--SW NW SW of Section 33

Rear view of pumping unit.

Plates 18 and 19: 4.9 miles from GZ--Gulf Bass 37--SW SW SW of Section 33

Plate 18: Individually powered beam pumping unit.

Plate 19: Electric motor and brackets.

Plates 20 through 23: 5.0 miles from GZ--Lee and Ladner Bass 2--SE SE SE of Section 32

Plate 20: Crack in foundation of pumping unit.

Plate 21: Indirect heater and piping.

Plate 22: Pipeline connection to oil-storage tanks.

Plate 23: Pipeline pump and line.

Plate 24: 5.0 miles from GZ--adjacent to Gulf Bass-Butler G1--SW NW SE of Section 32

Water tank at compressor station.

Plates 25 through 31: 4.9 miles from GZ--adjacent to Gulf Bass 37--
SW SW SW of Section 33

Plate 25: Heater-treaters and separator.

Plate 26: Brine disposal tank and separator.

Plate 27: Pressure recorder and chart.

Plate 28: Oil-storage tanks.

Plate 29: Gas compressor.

Plate 30: Lubricator tank on brine-disposal pump.

Plate 31: Brine-disposal pump and tanks.

Plate 32: 5.3 miles from GZ--adjacent to Gulf Bass 32--NW NE SW of
Section 4

Heater-treaters and tank battery.

Plate 33: 5.5 miles from GZ--Gulf Andrew 32--W $\frac{1}{2}$ W $\frac{1}{2}$ NE of Section 5
Base of "A" frame on pumping unit.

Plate 34: 5.5 miles from GZ--Gulf Andrew 27--W $\frac{1}{2}$ NW SW of Section 4
Crack in concrete pad for pumping unit.

Plates 35 and 36: 5.2 miles from GZ--Gulf Butler 2--SW SW SE of
Section 32

Plate 35: Base of "A" frame on pumping unit.

Plate 36: Heater-treater.

Plates 37 and 38: 5.1 miles from GZ--Taylor Cameron 2--S $\frac{1}{2}$ S $\frac{1}{2}$ NW of
Section 32

Plate 37: Service derrick and pumping unit.

Plate 38: Bottom of derrick, pumping unit, and barrels.

Plates 39 and 40: 5.2 miles from GZ--Taylor Cameron 1--SW SW NW of
Section 32

Plate 39: Service derrick and pumping unit.

Plate 40: Motor and gear box of pumping unit.

Plate 41: 5.3 miles from GZ--adjacent to Gulf Bass 32--SW SE NW of
Section 4

Indirect heaters and oil-storage tanks.

Plates 42 through 48: 6.0 miles from GZ--United Gas Company Dehydra-
tion Plant--center of Section 9

Plate 42: Indirect heaters and piping.

Plate 43: Dehydration towers.

Plate 44: Subsurface inlet and outlet valves from gas pipelines
to dehydration plant.

Plate 45: Field scrubber.


Plate 46: Lines from compressor.

Plate 47: 1,500-horsepower Ingersoll-Rand compressor.


Plate 48: Compressor house and plant.

APPENDIX D

Photographs

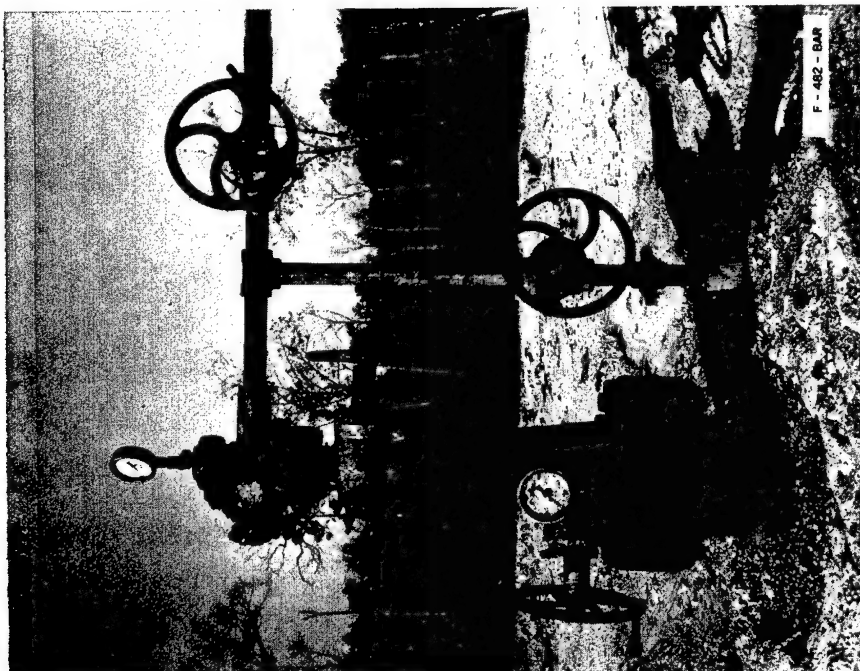


Preshot

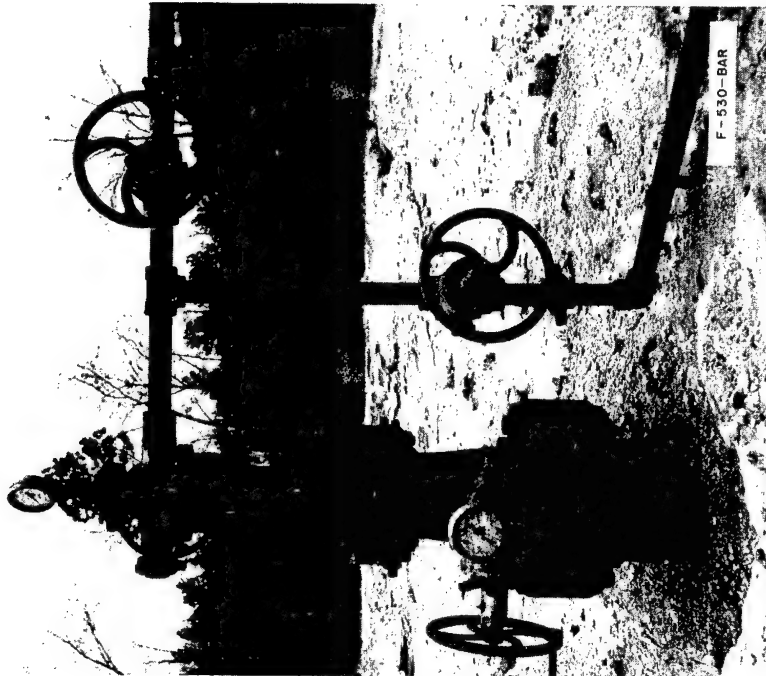


Postshot

Plate 2

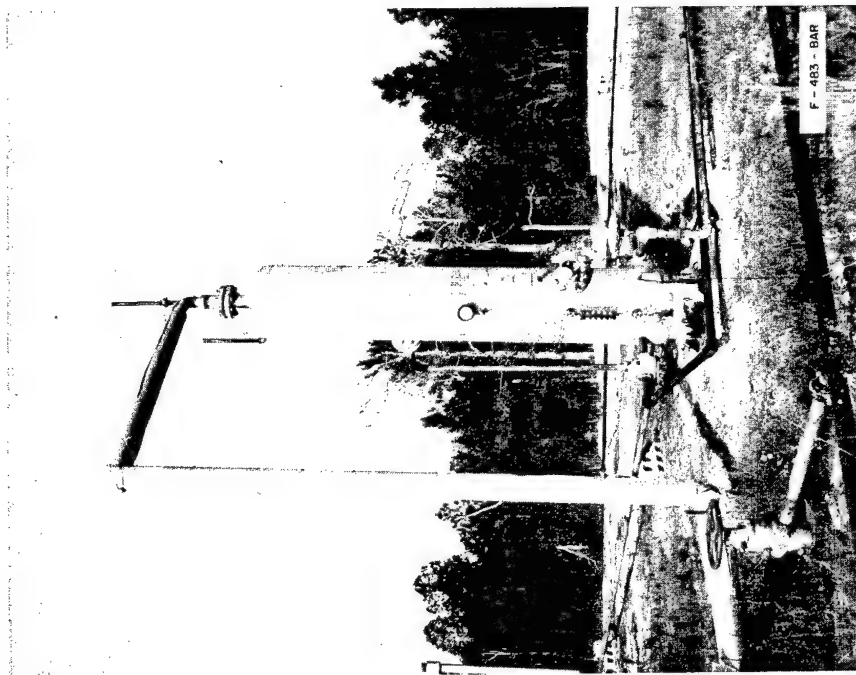


Preshot

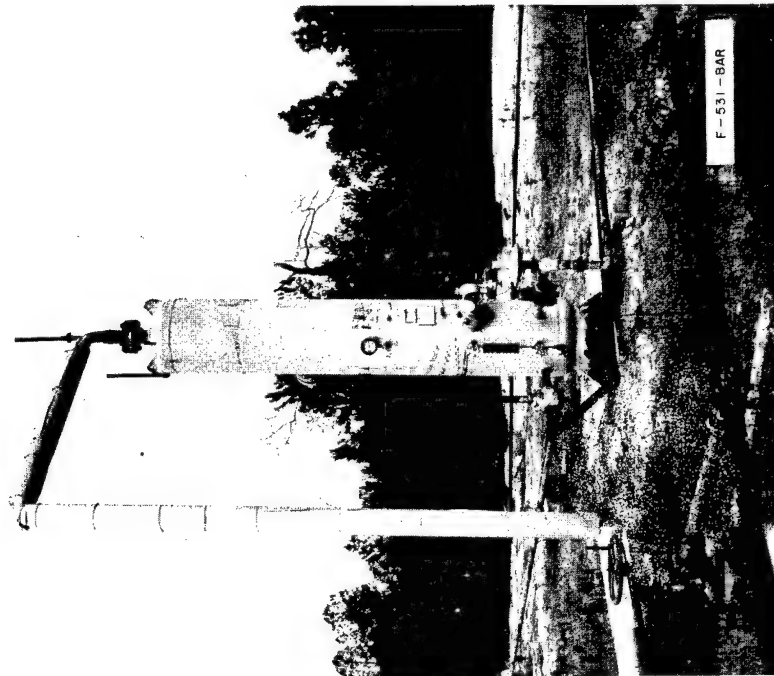

Postshot

Plate 3

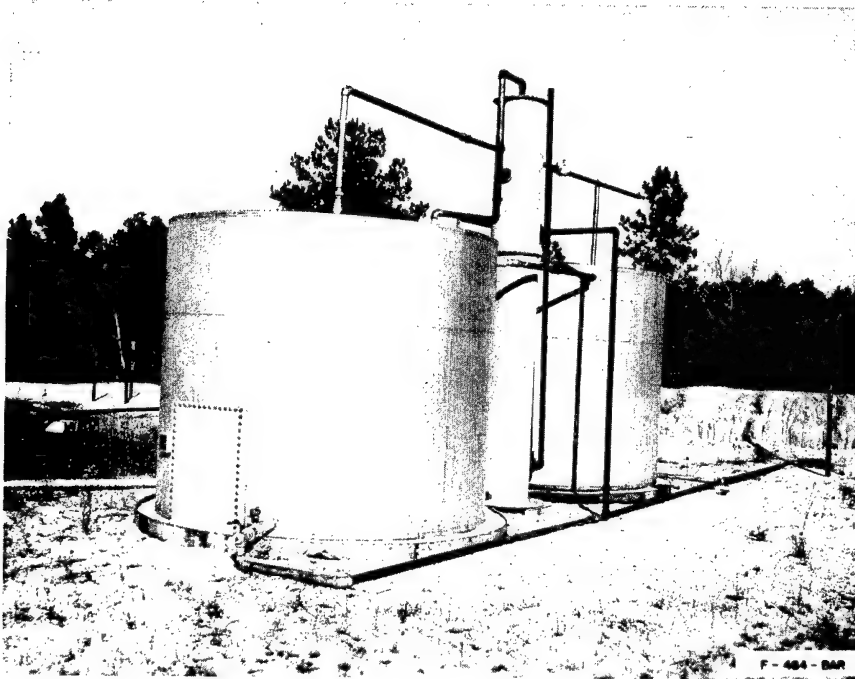


Preshot




Postshot

Plate 4

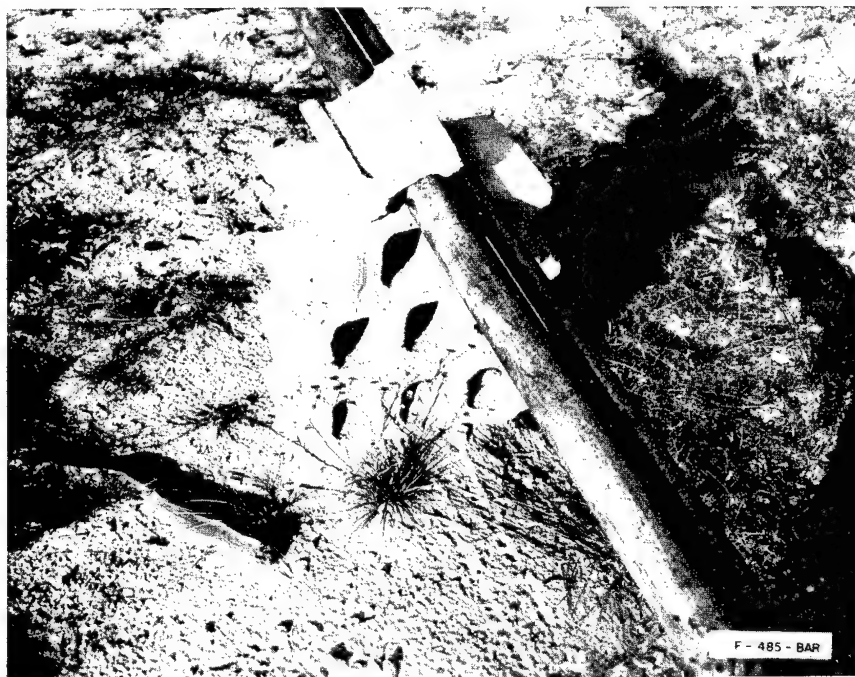


Preshot

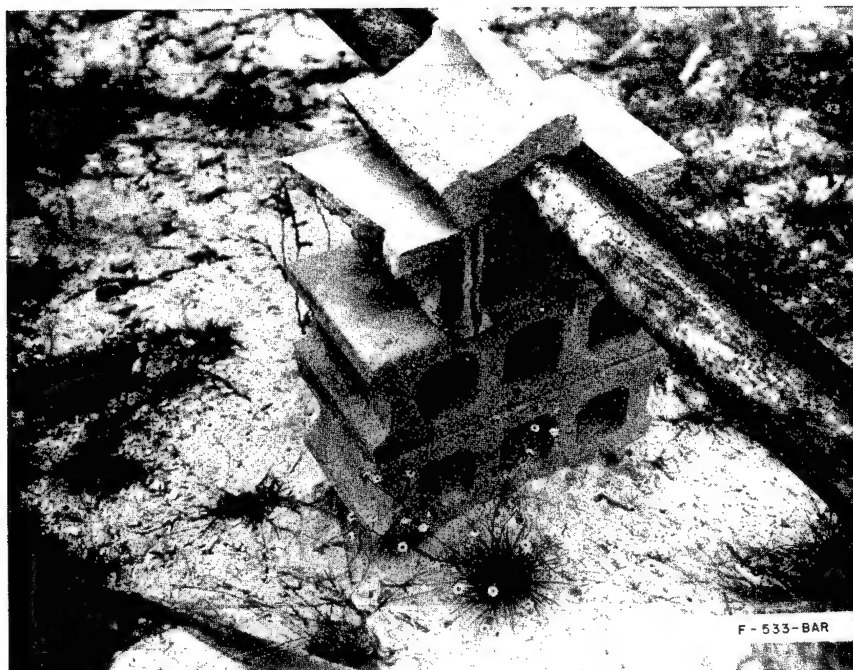


Postshot

Plate 5

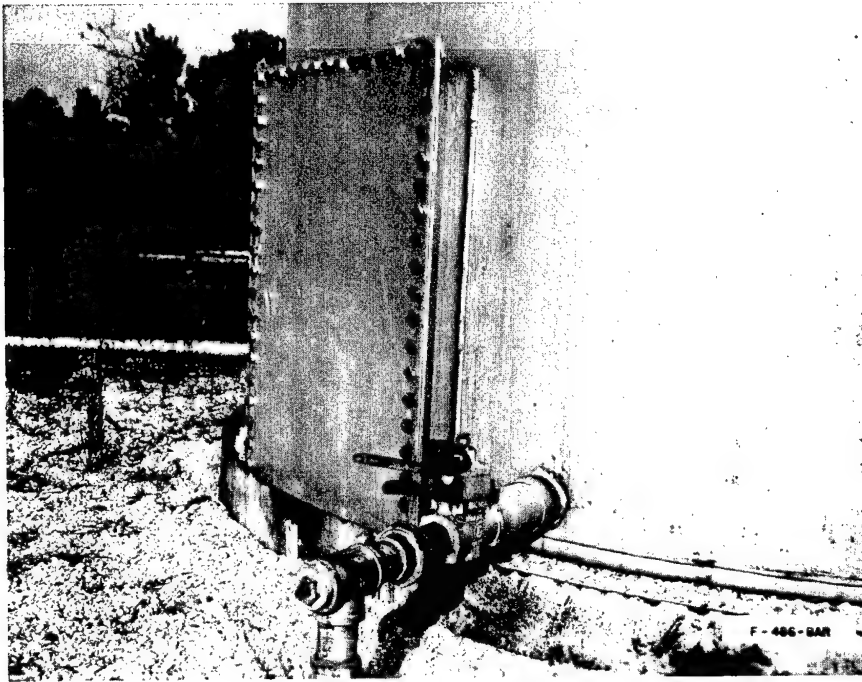


Preshot

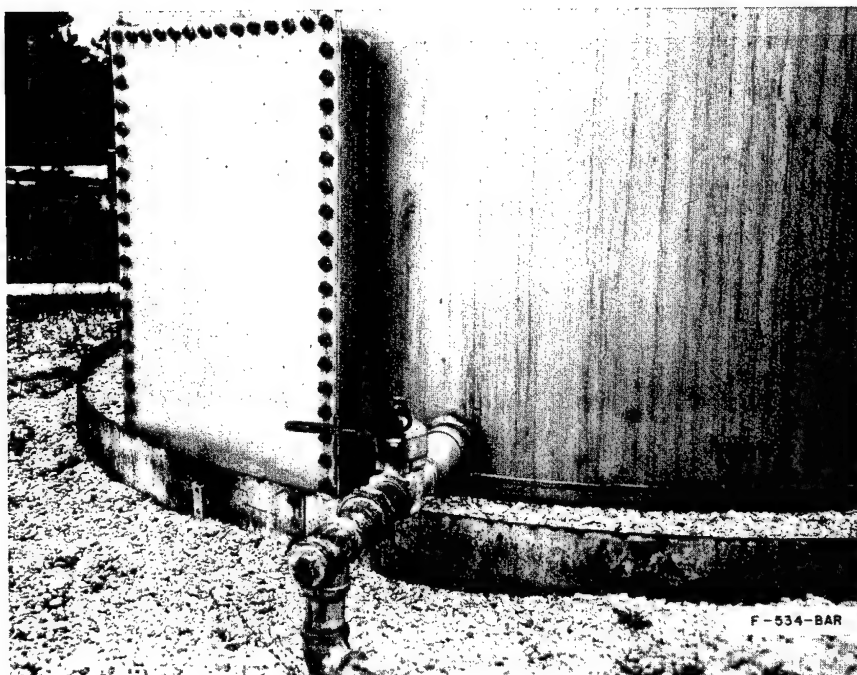

Postshot

Plate 6

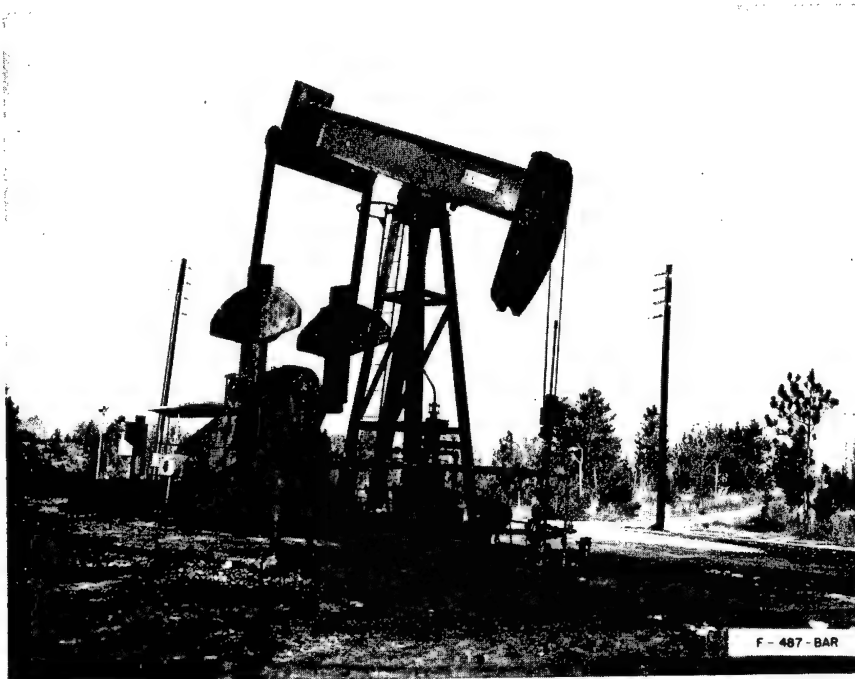

Preshot




Postshot

Plate 7



Preshot

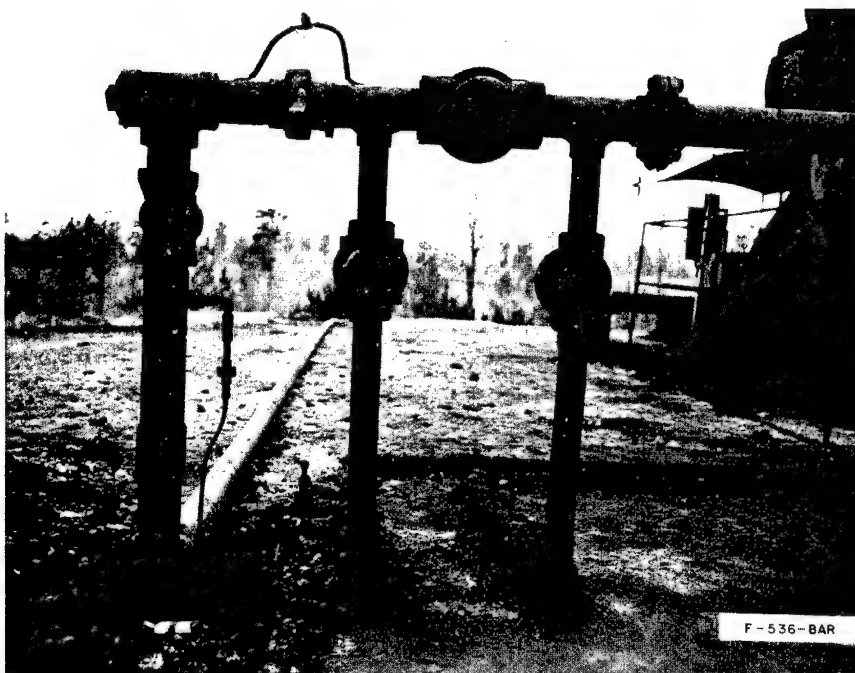

Postshot

Plate 8




Preshot



Postshot

Plate 9

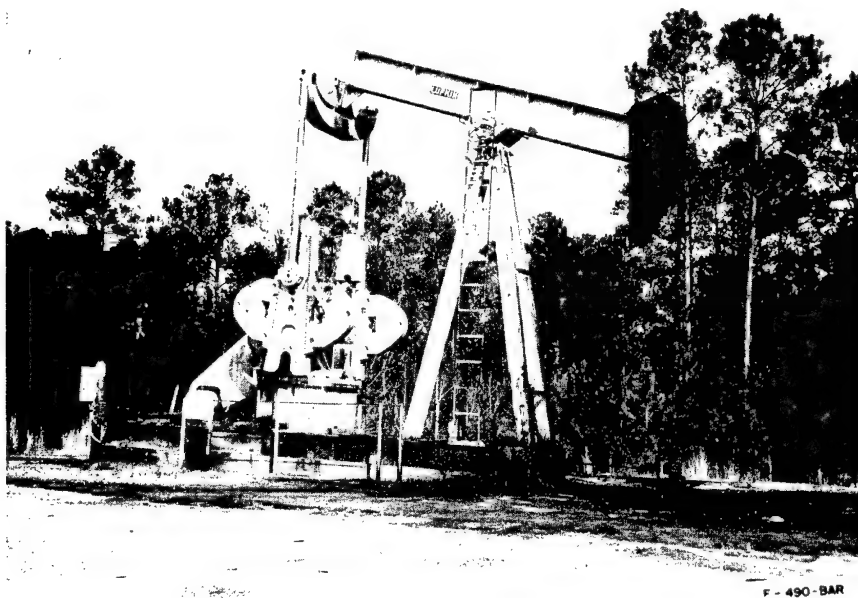


Preshot




Postshot

Plate 10

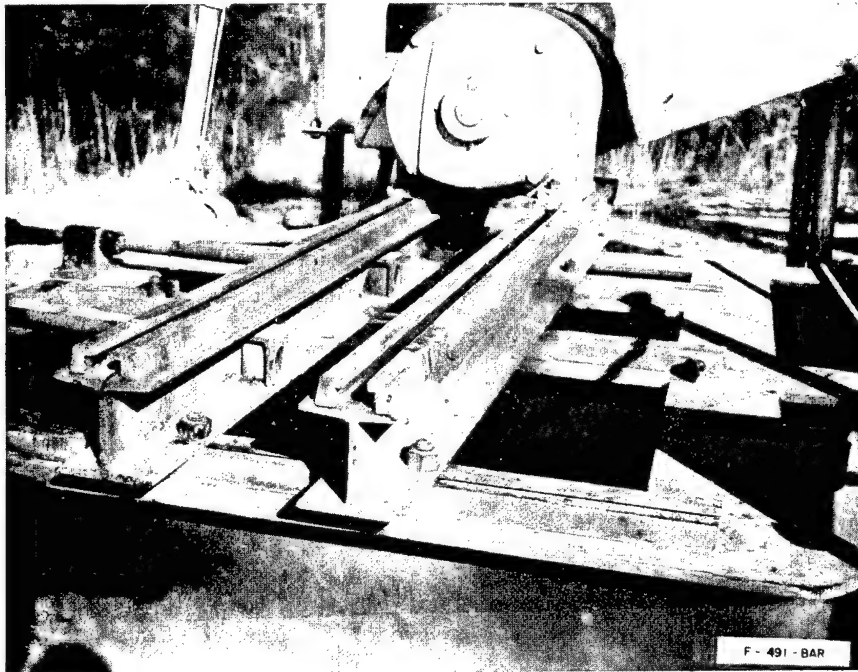


Preshot

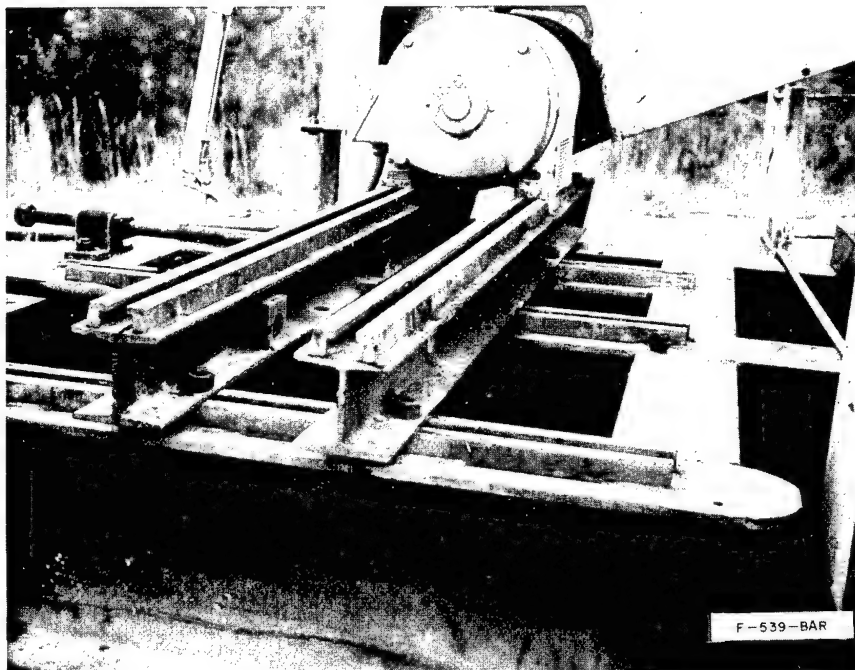

Postshot

Plate 11

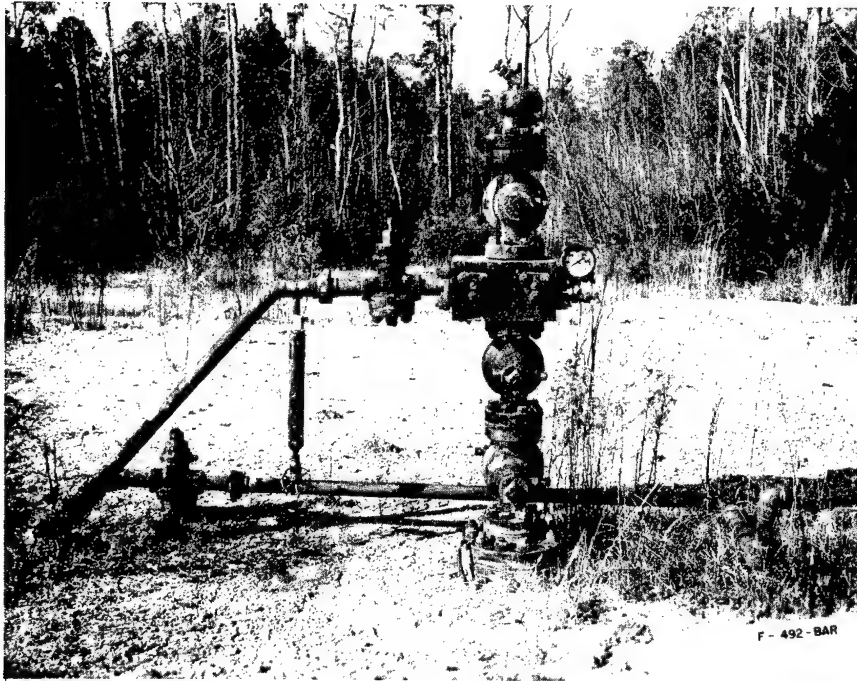


Preshot



Postshot

Plate 12

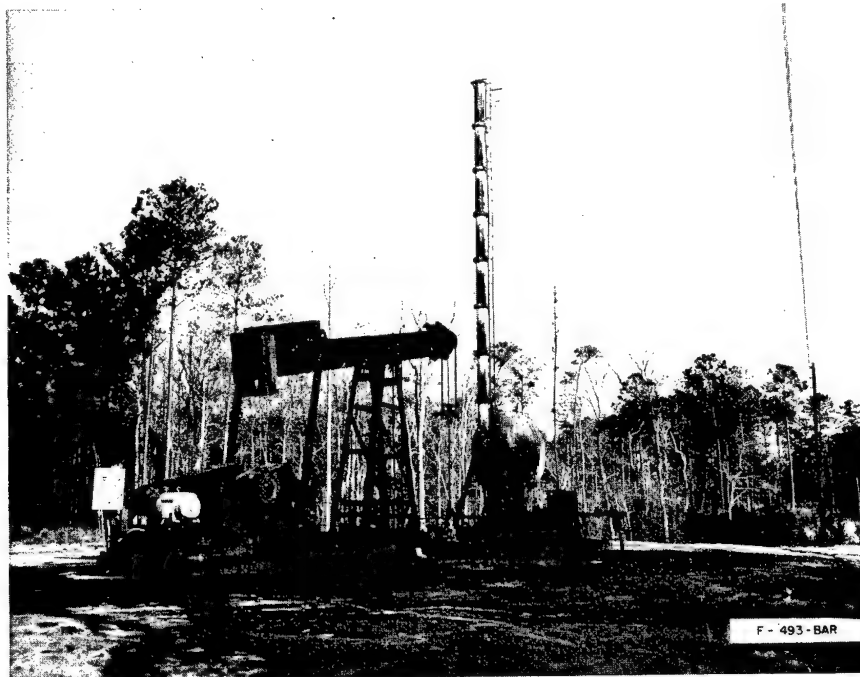


Preshot




Postshot

Plate 13

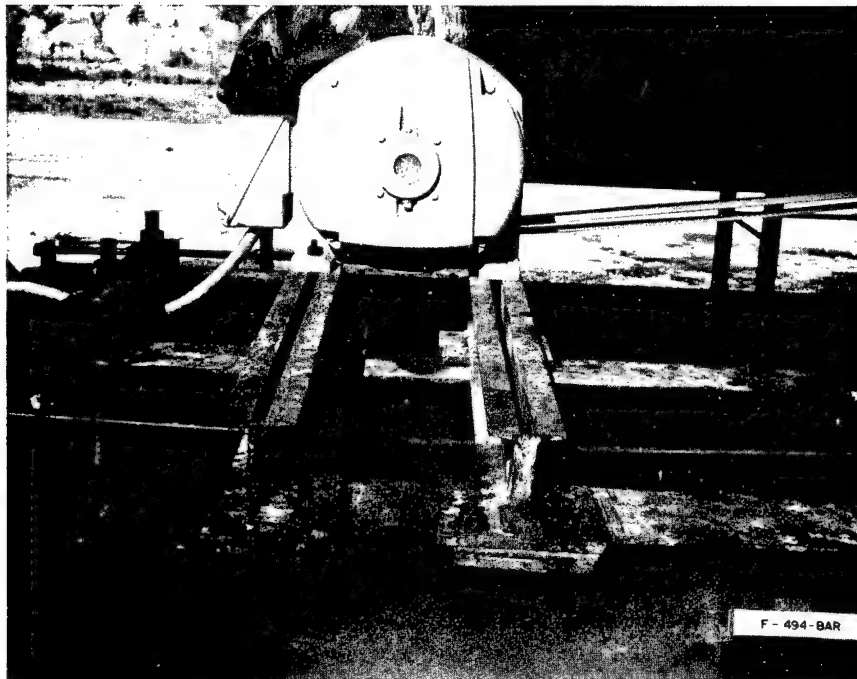


Preshot

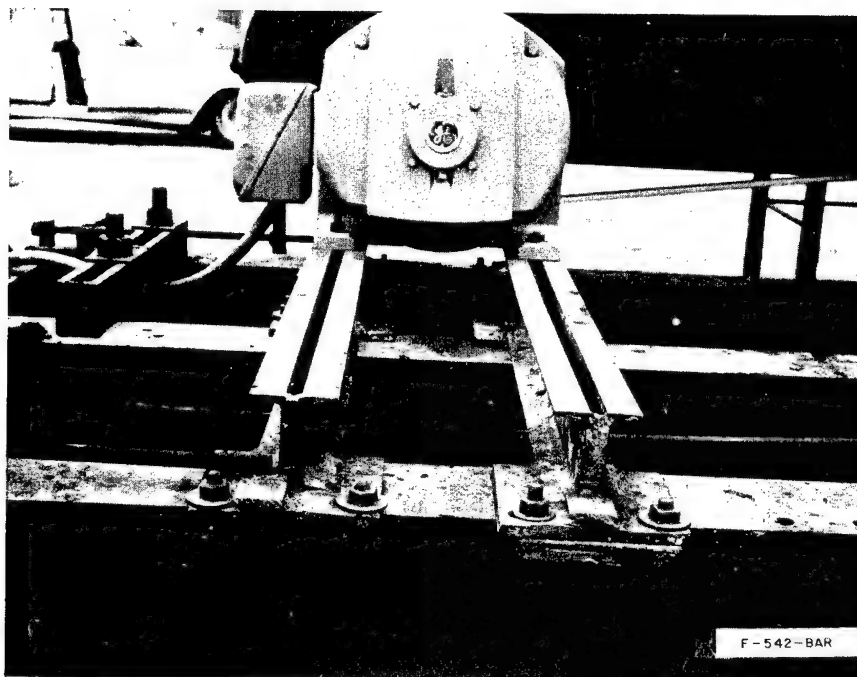


Postshot

Plate 14

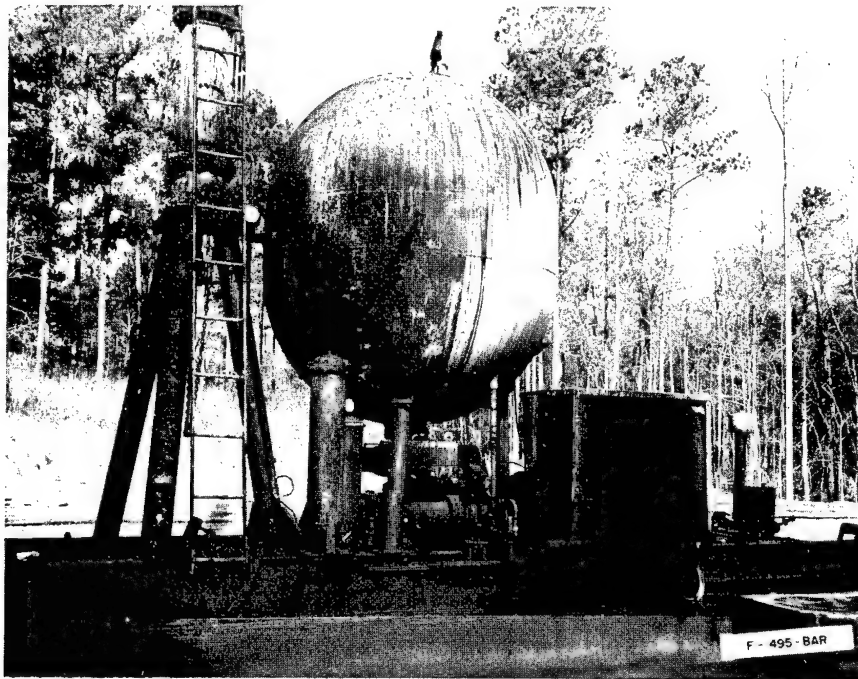


Preshot

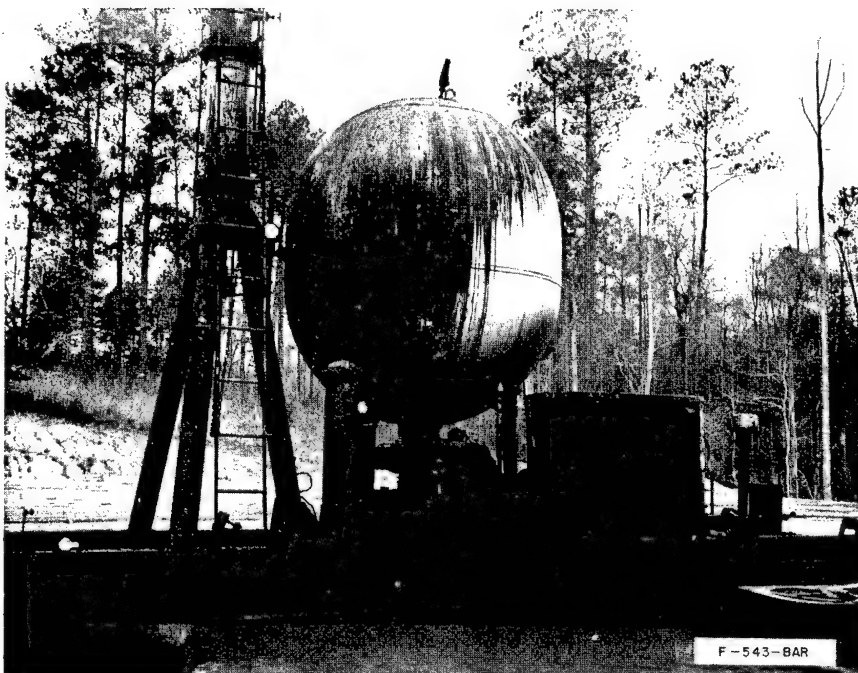


Postshot

Plate 15

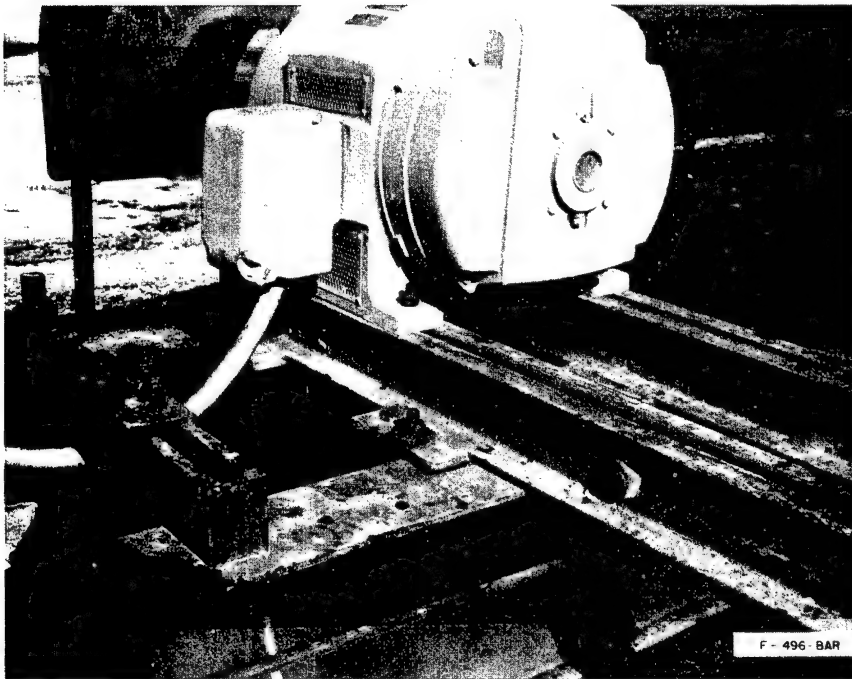


Preshot

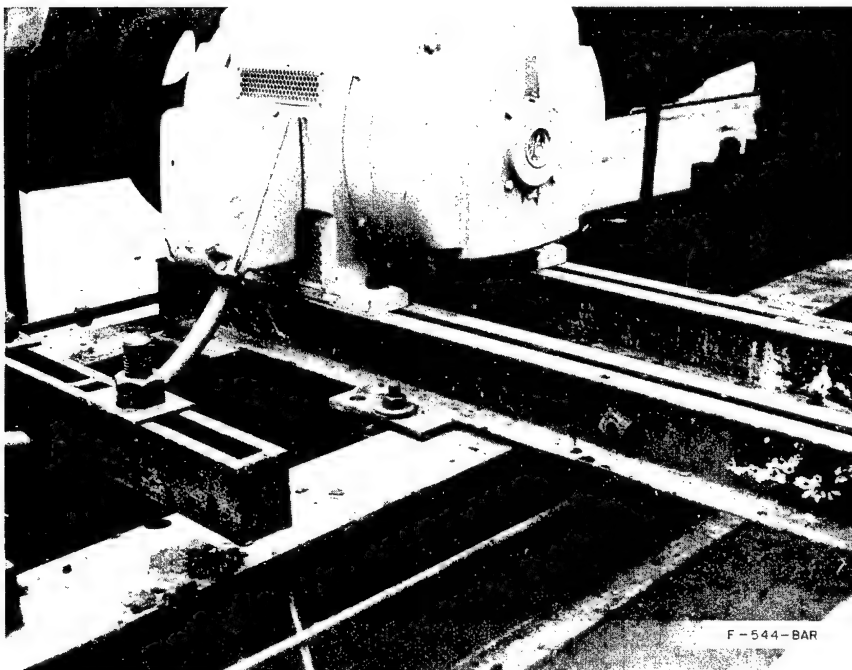


Postshot

Plate 16

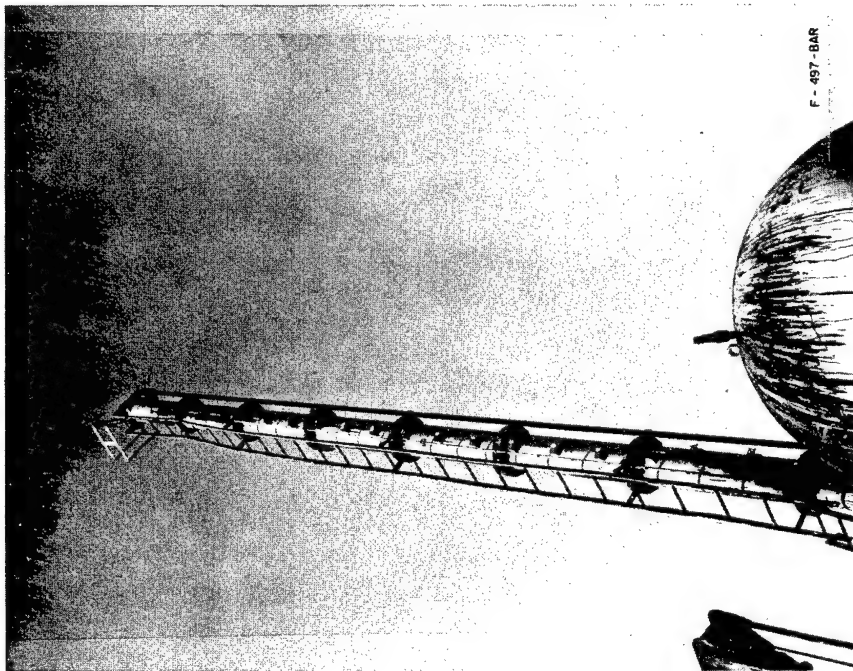


Preshot

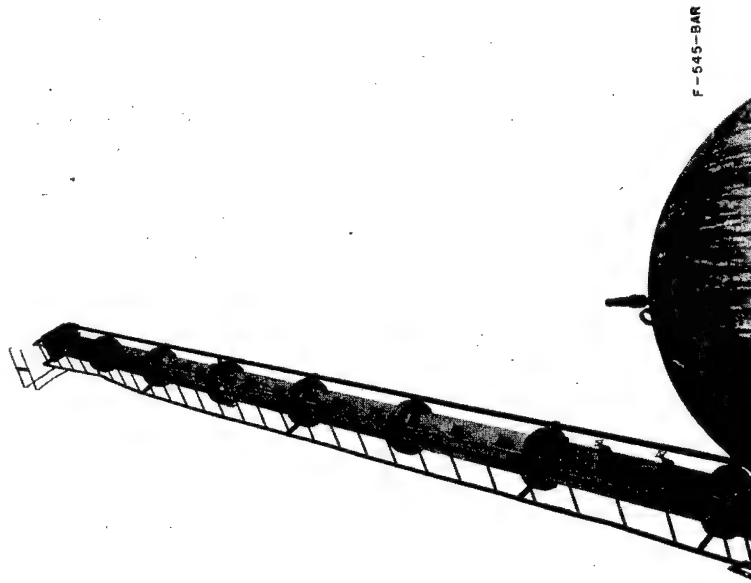


Postshot

Plate 17

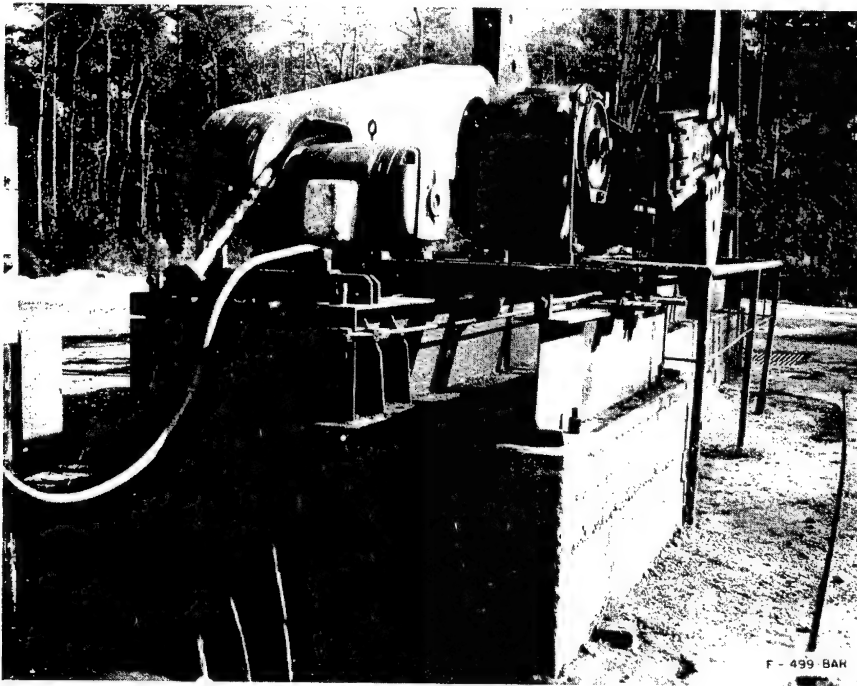


Preshot

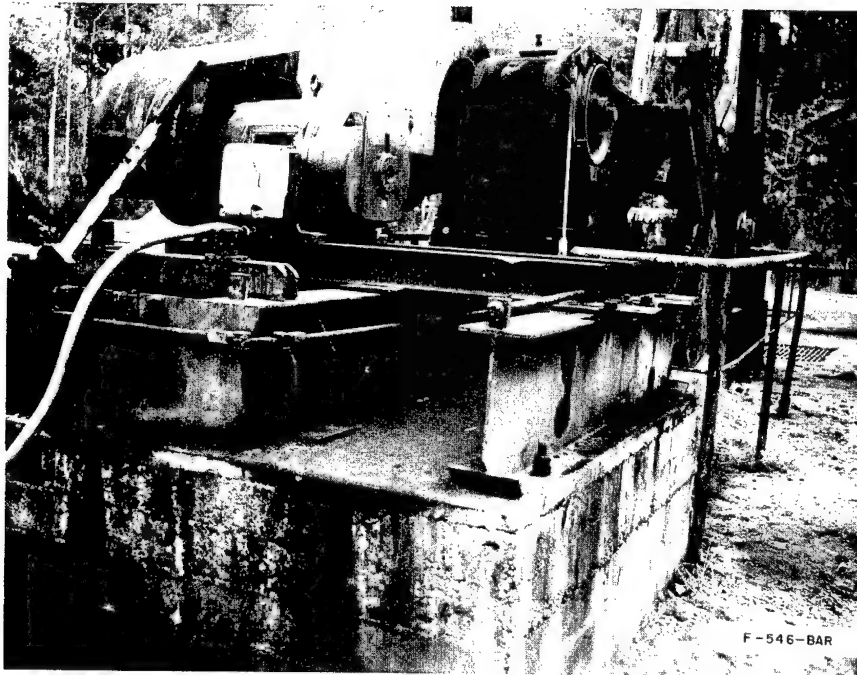

Postshot

Plate 18

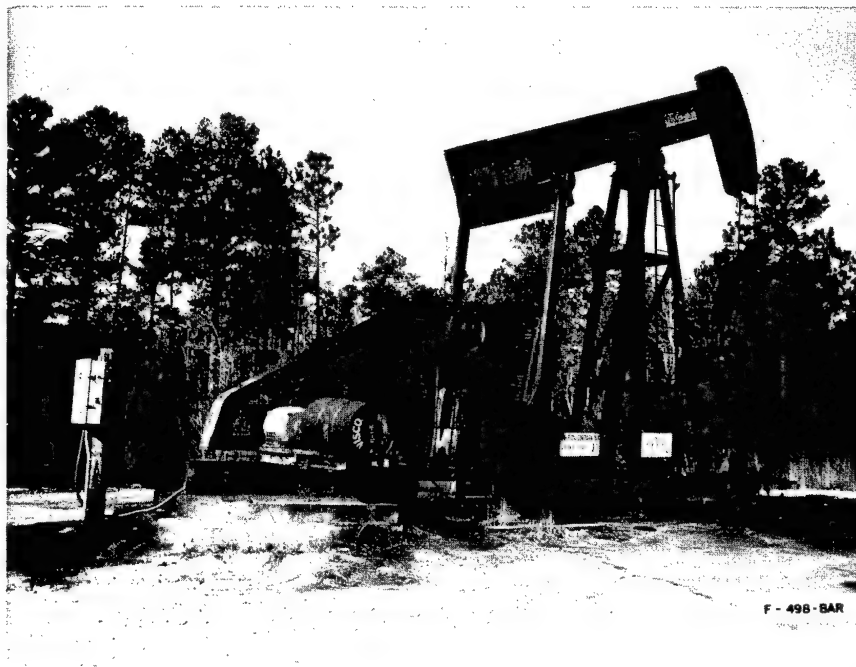


Preshot




Postshot

Plate 19

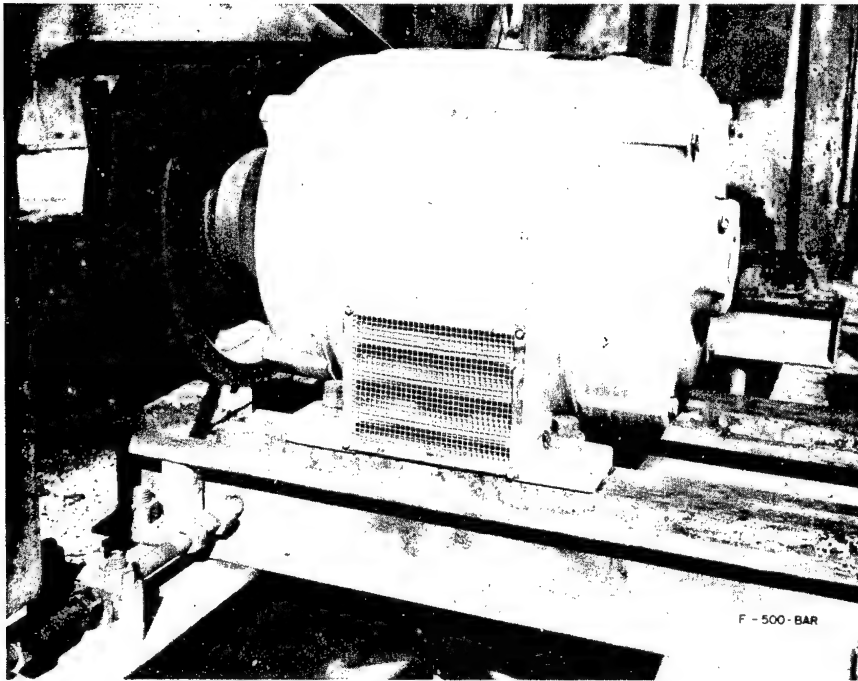

Preshot

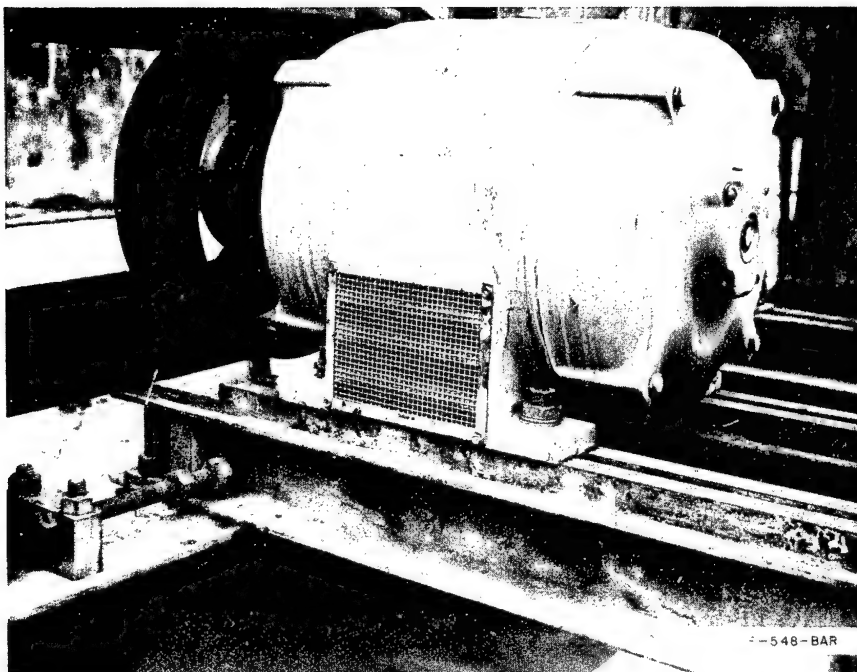

Postshot

Plate 20



Preshot




Postshot

Plate 21



Preshot

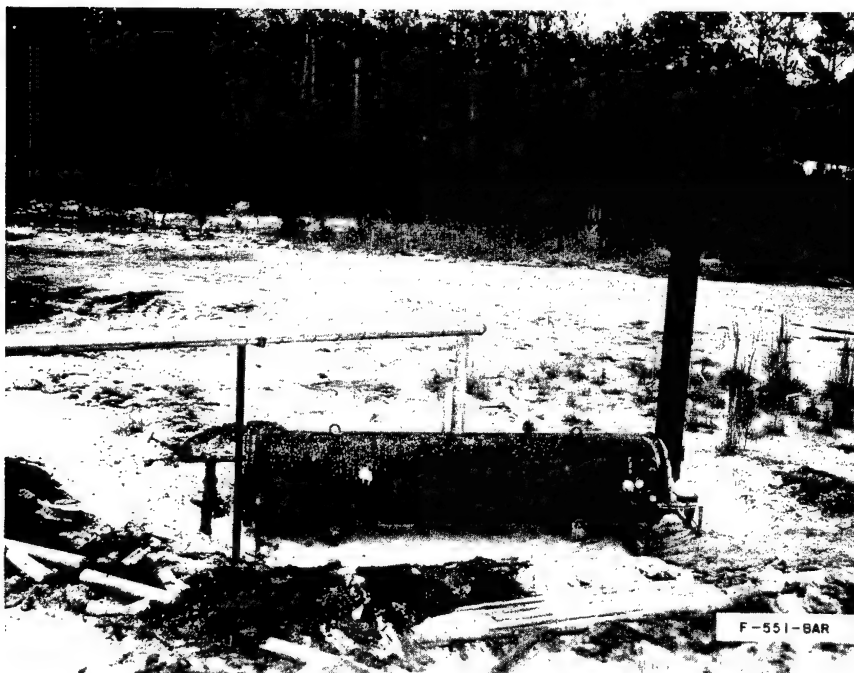


Postshot

Plate 22



Preshot

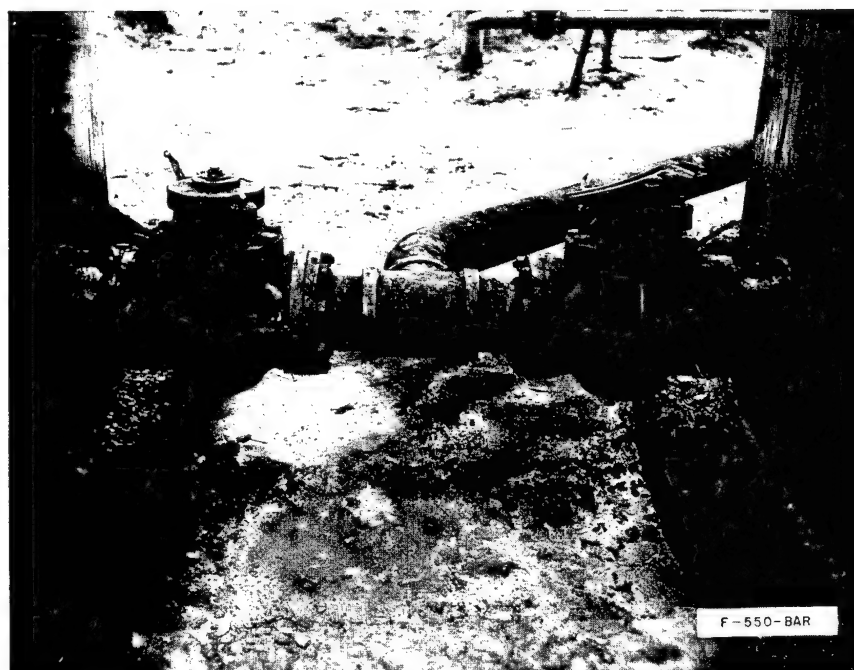

Postshot

Plate 23



Preshot




Postshot

Plate 24




Preshot

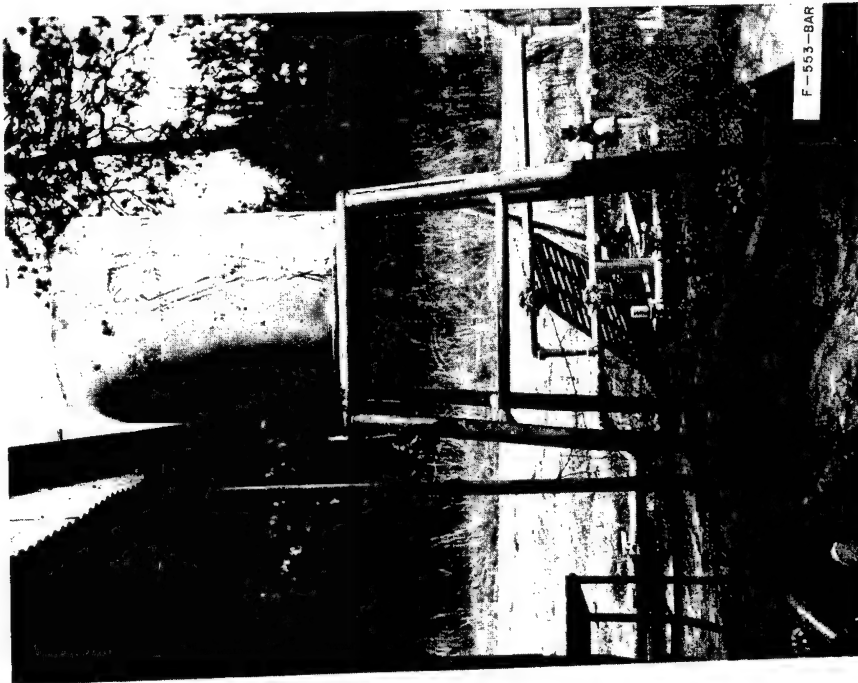


Postshot

Plate 25

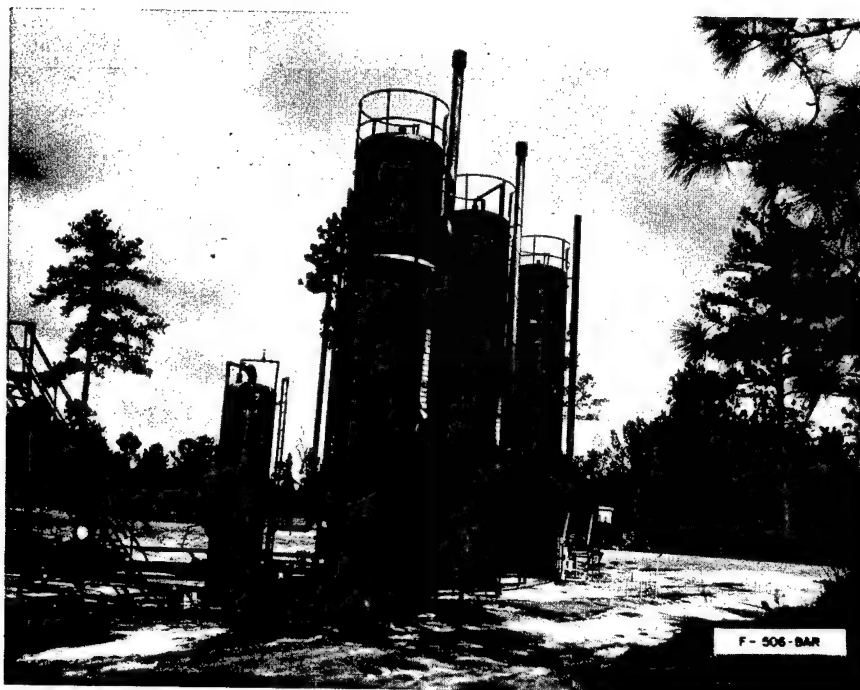


Preshot

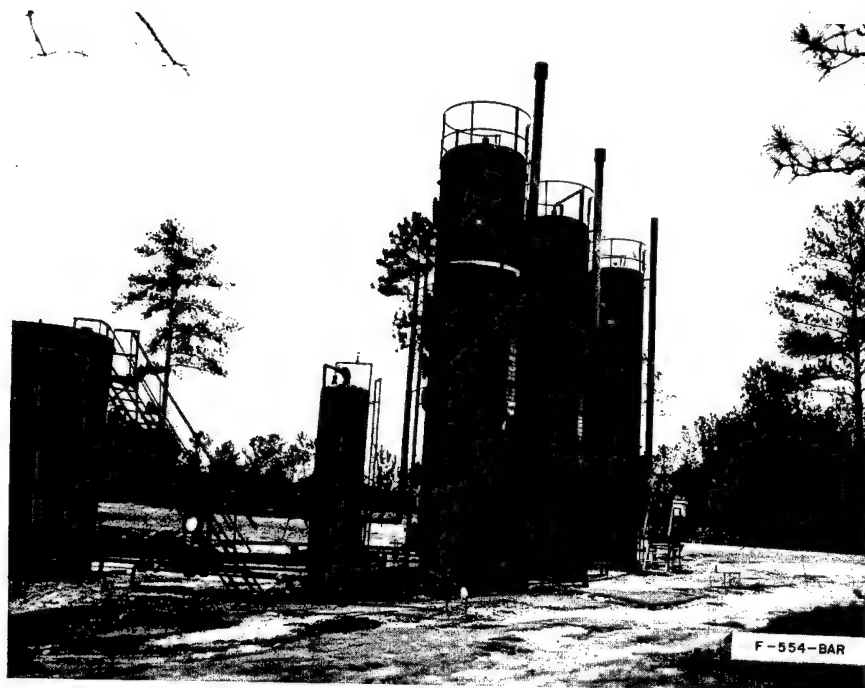


Postshot

Plate 26

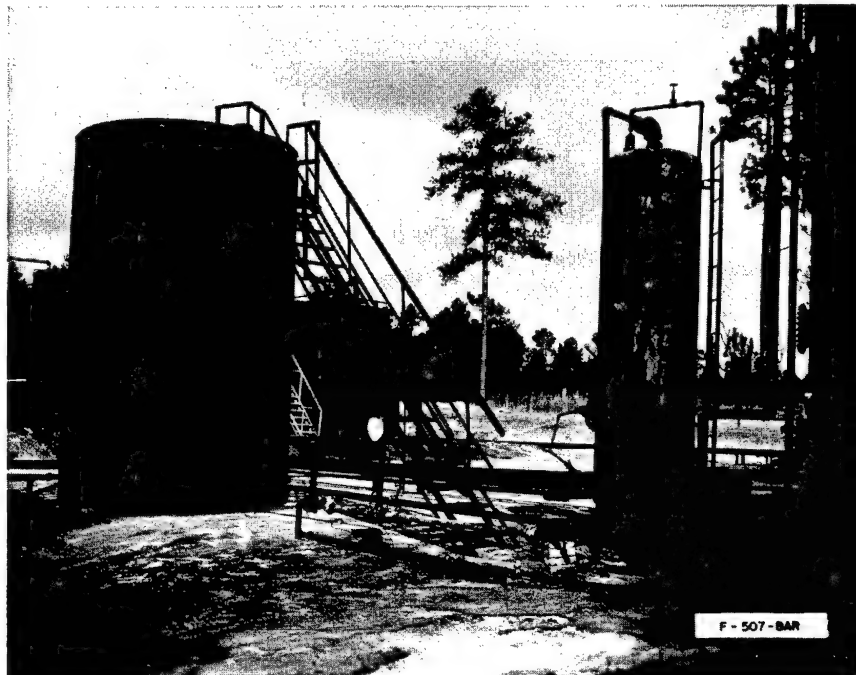

Preshot

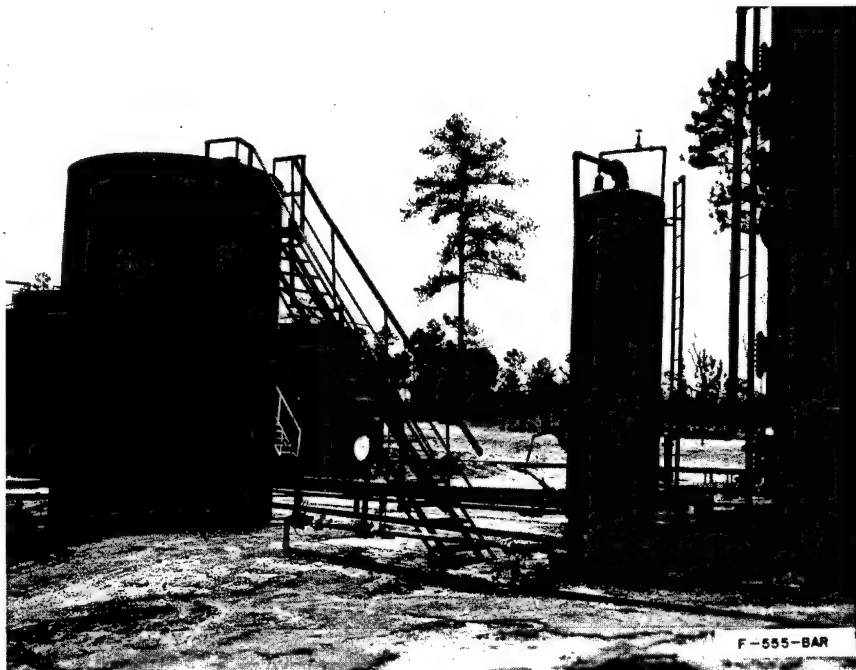


Postshot

Plate 27




Preshot

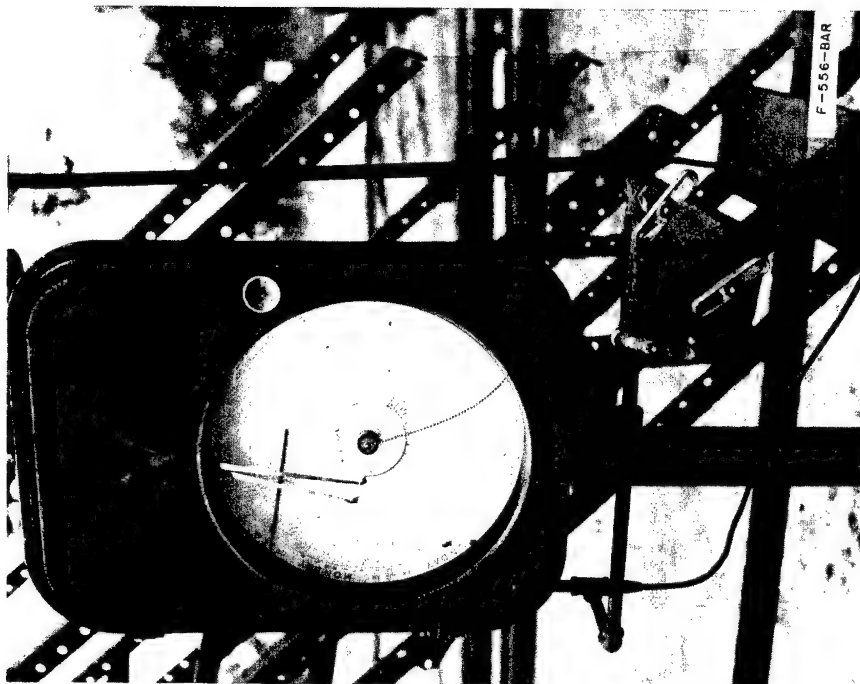


Postshot

Plate 28

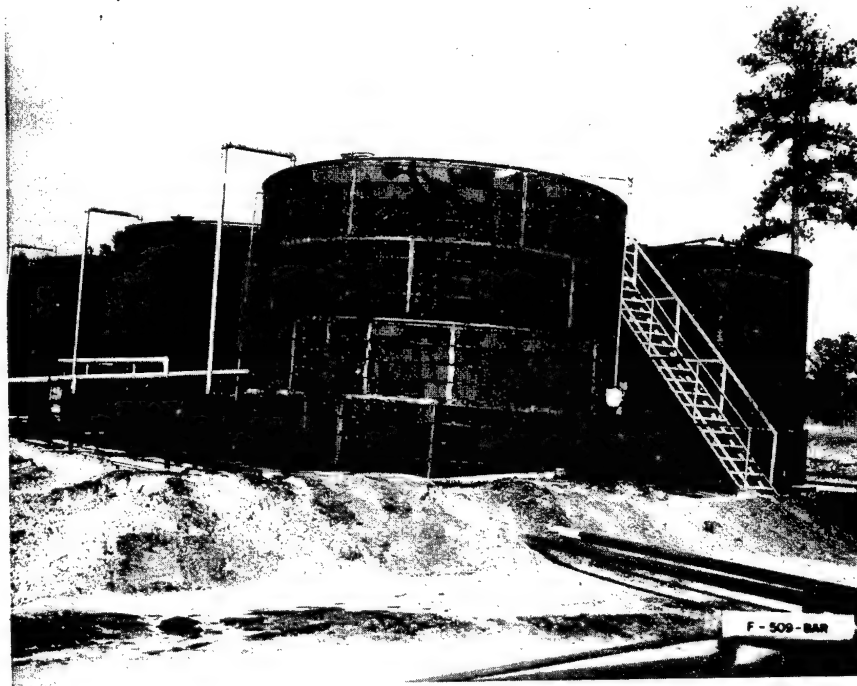


Preshot

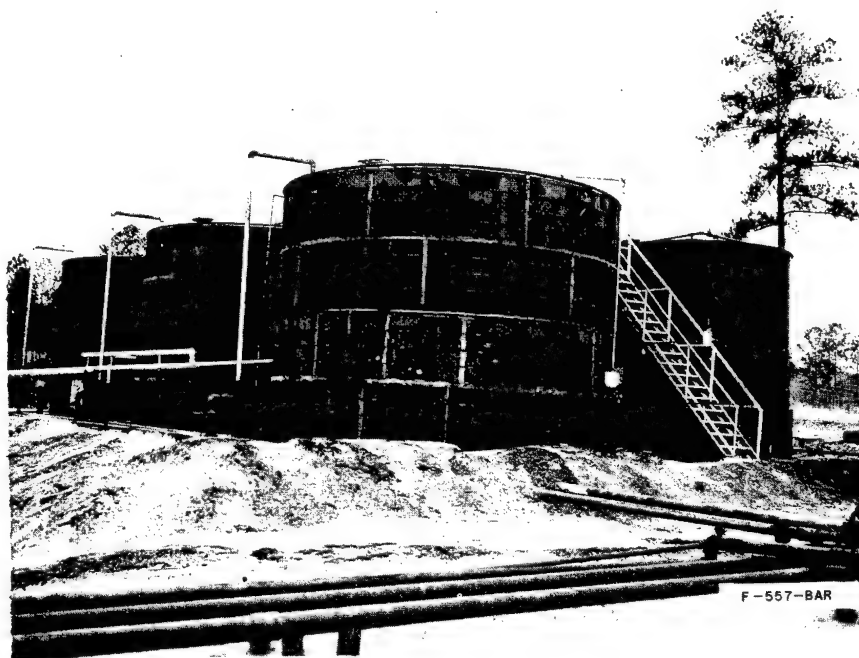


Postshot

Plate 29

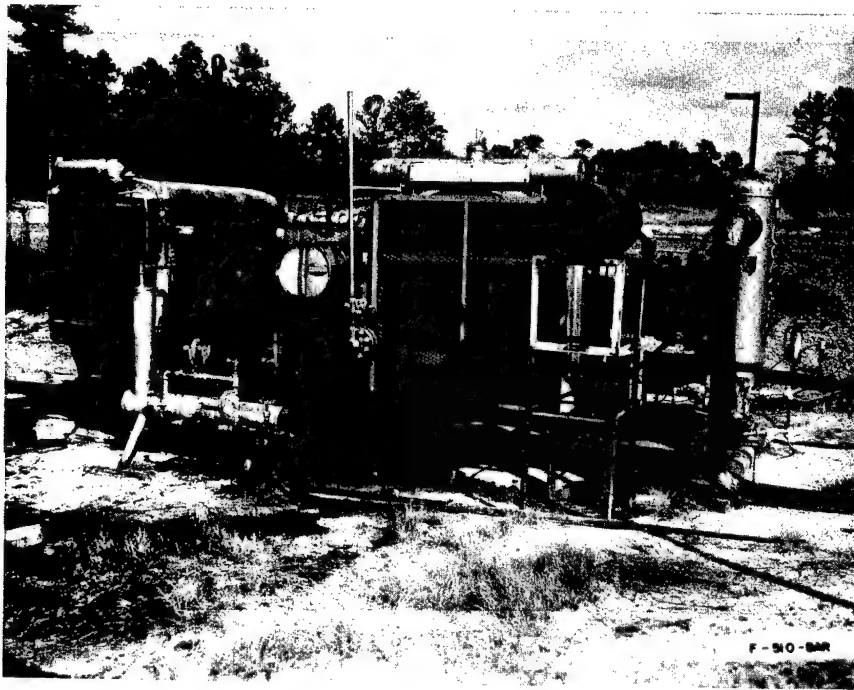


Preshot

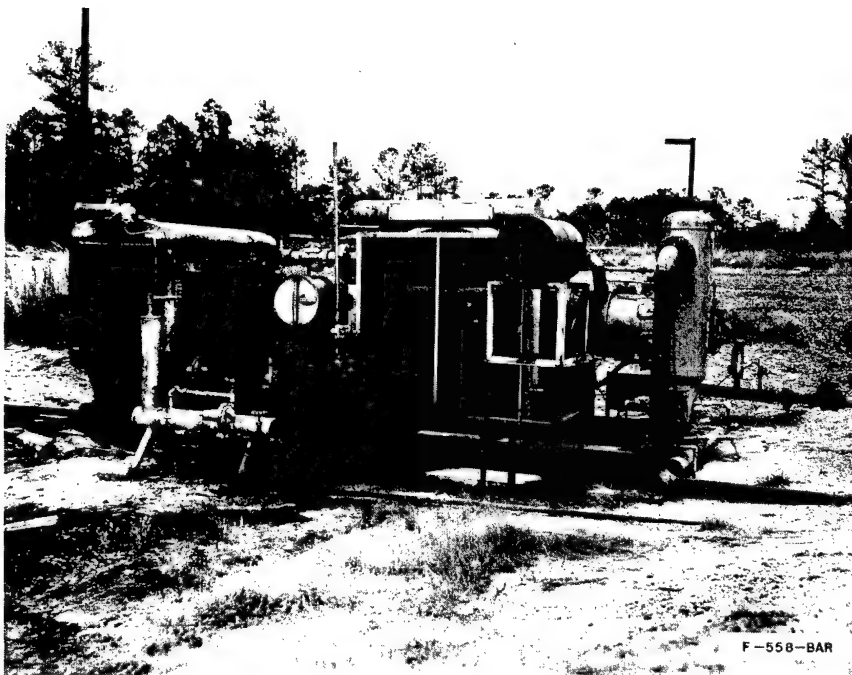


Postshot

Plate 30

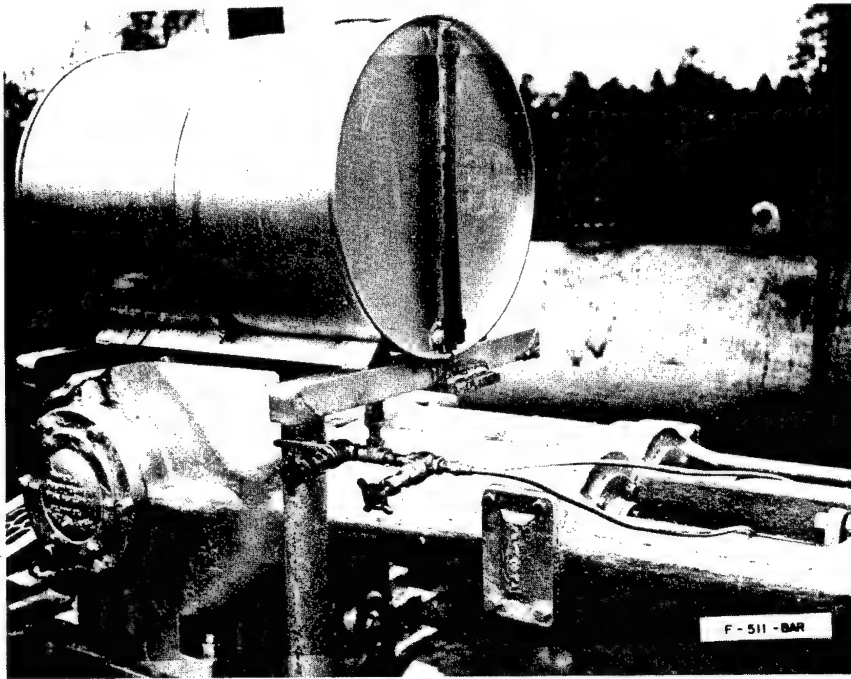


Preshot

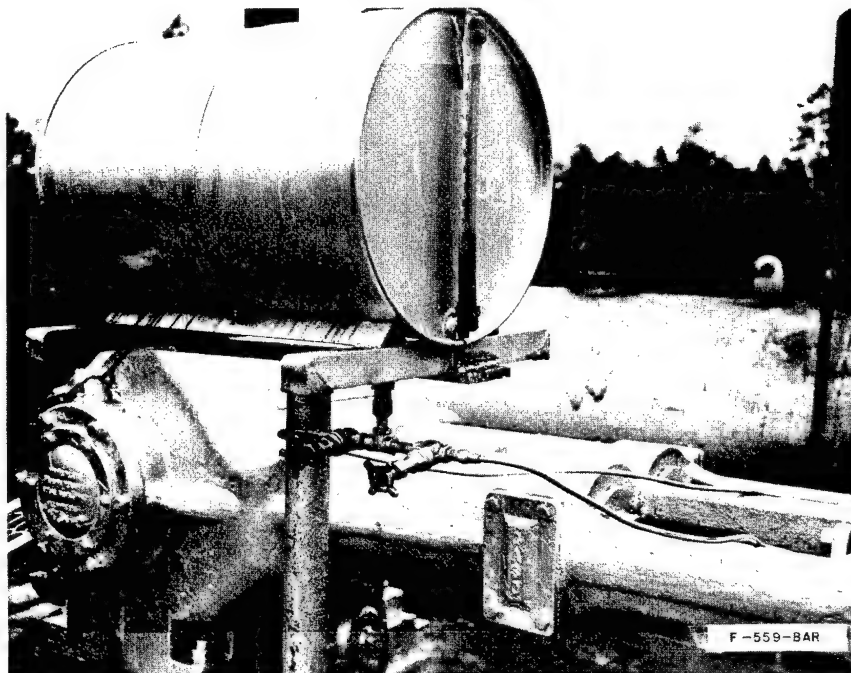


Postshot

Plate 31

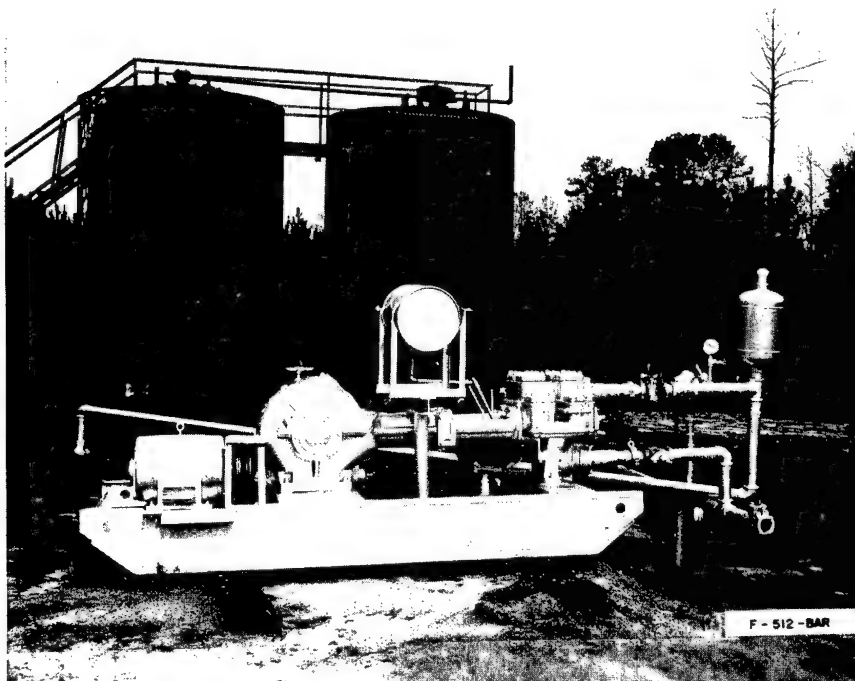


Preshot

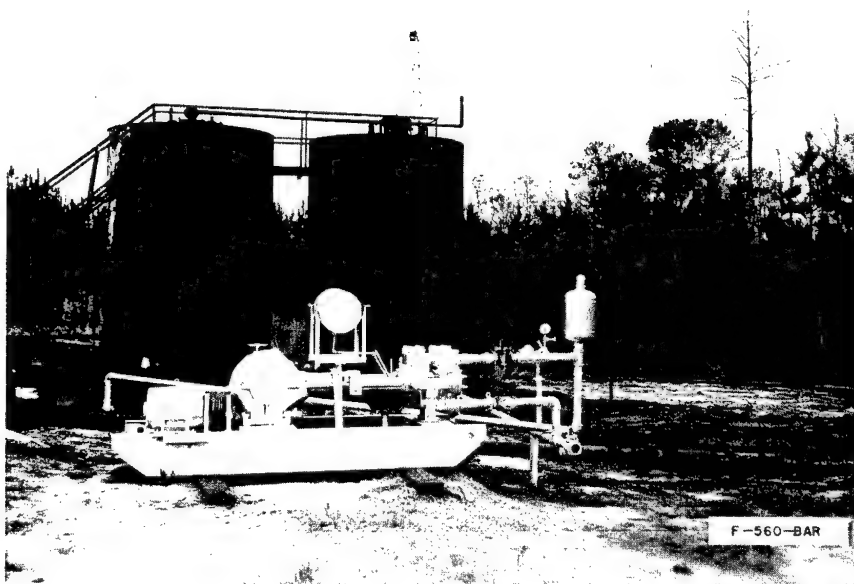


Postshot

Plate 32

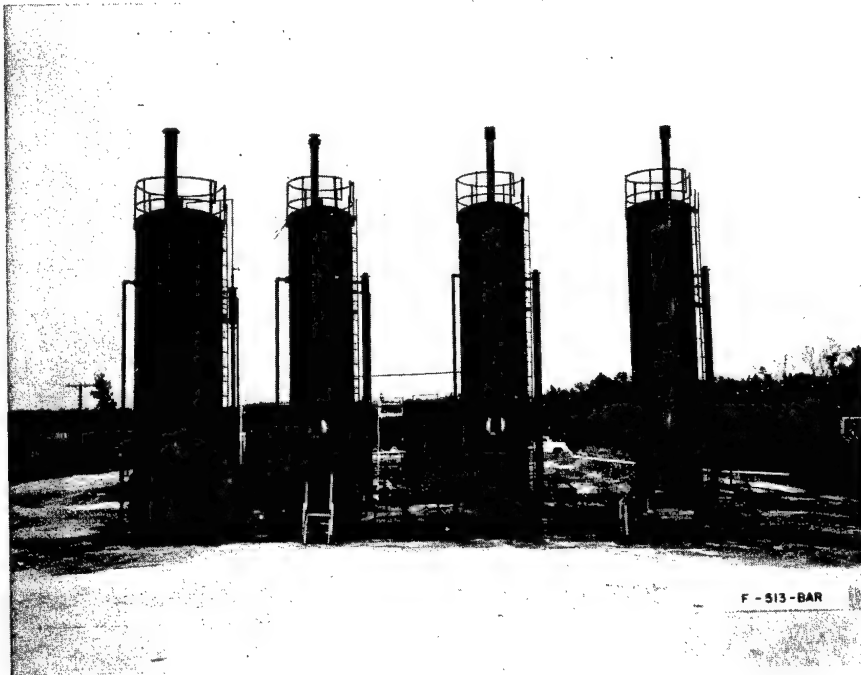

Preshot

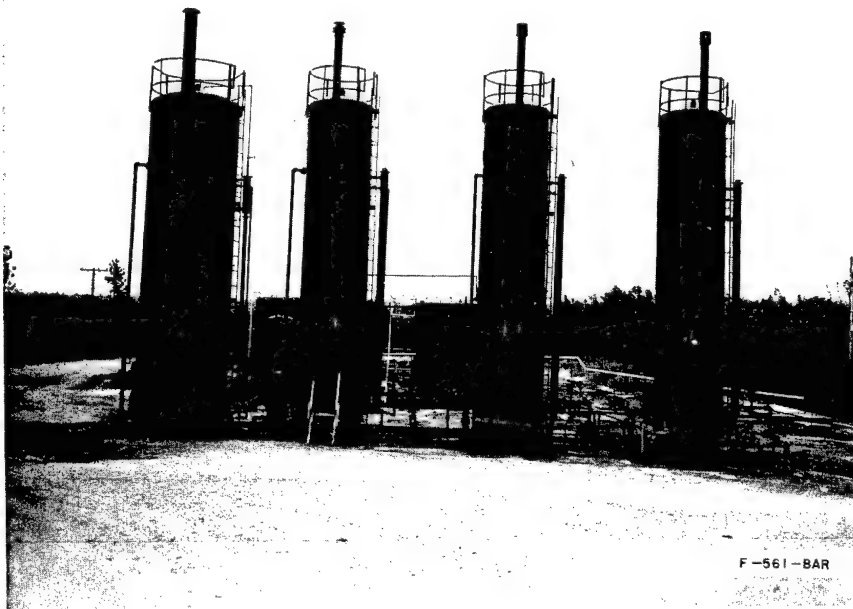


Postshot

Plate 33



Preshot

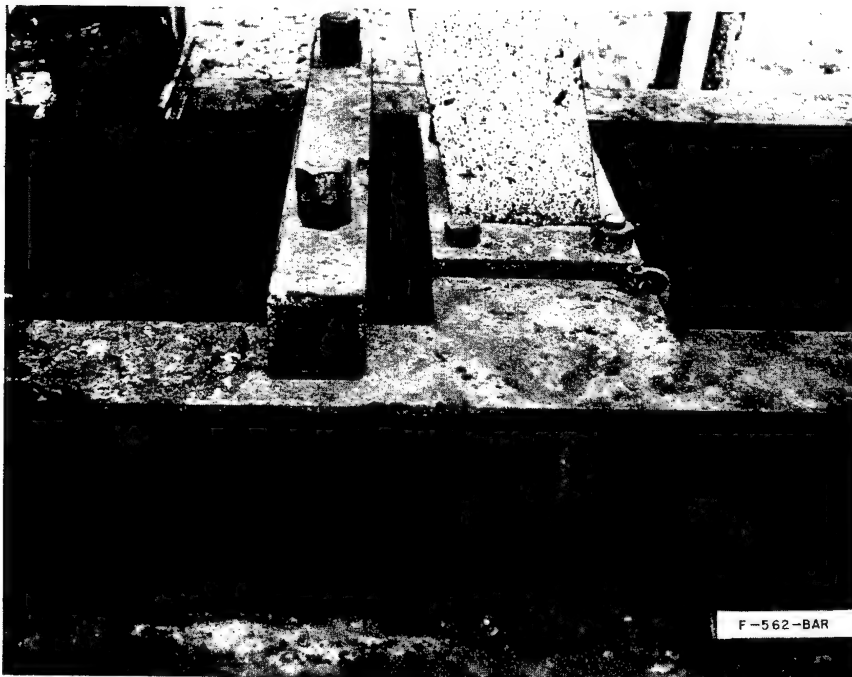


Postshot

Plate 34




Preshot

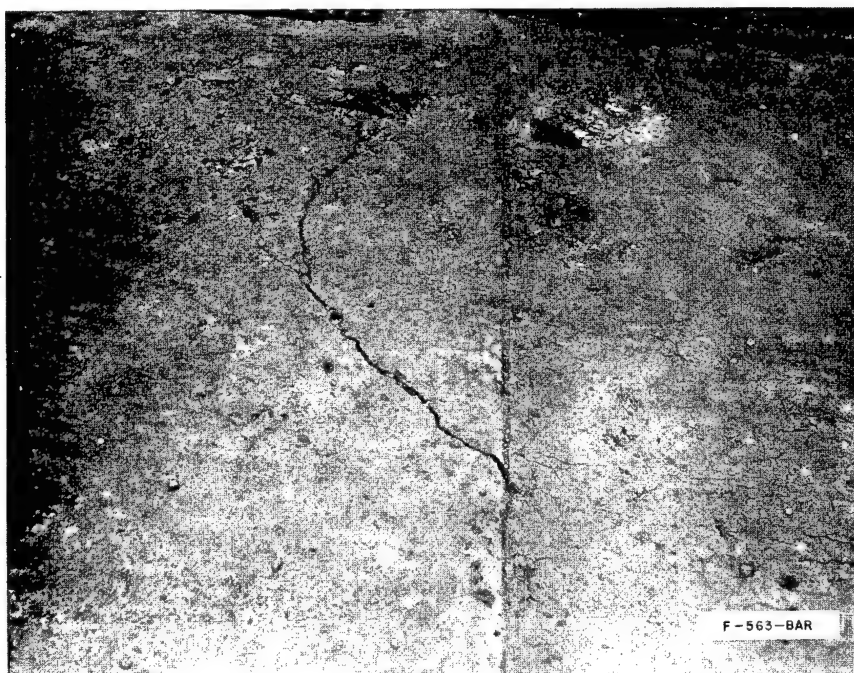


Postshot

Plate 35

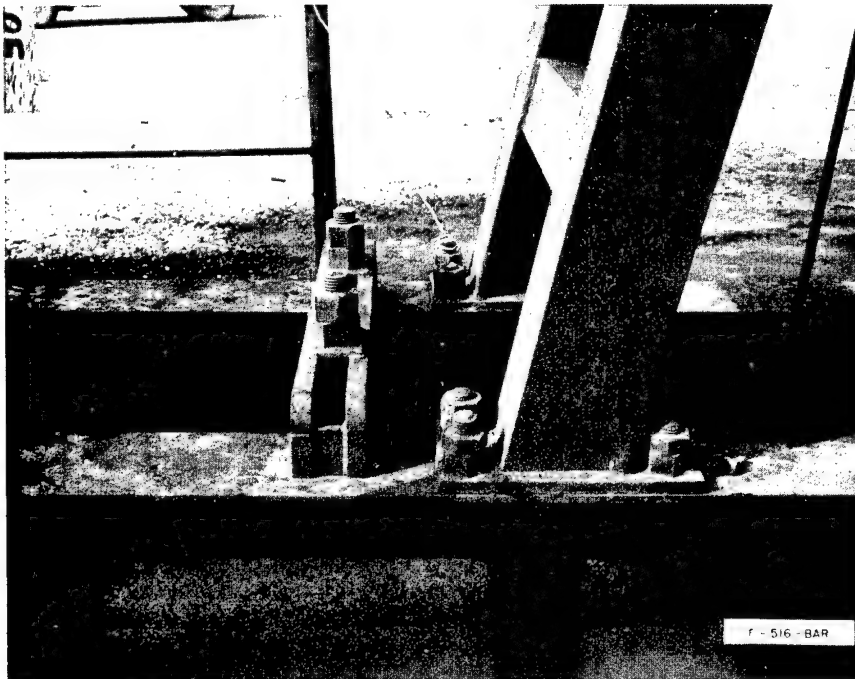


Preshot

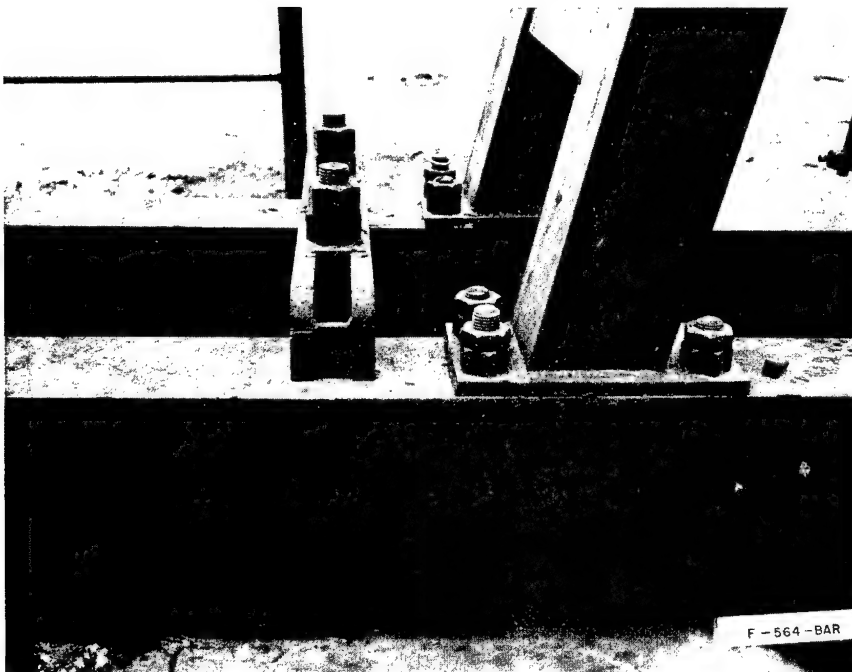


Postshot


Plate 36

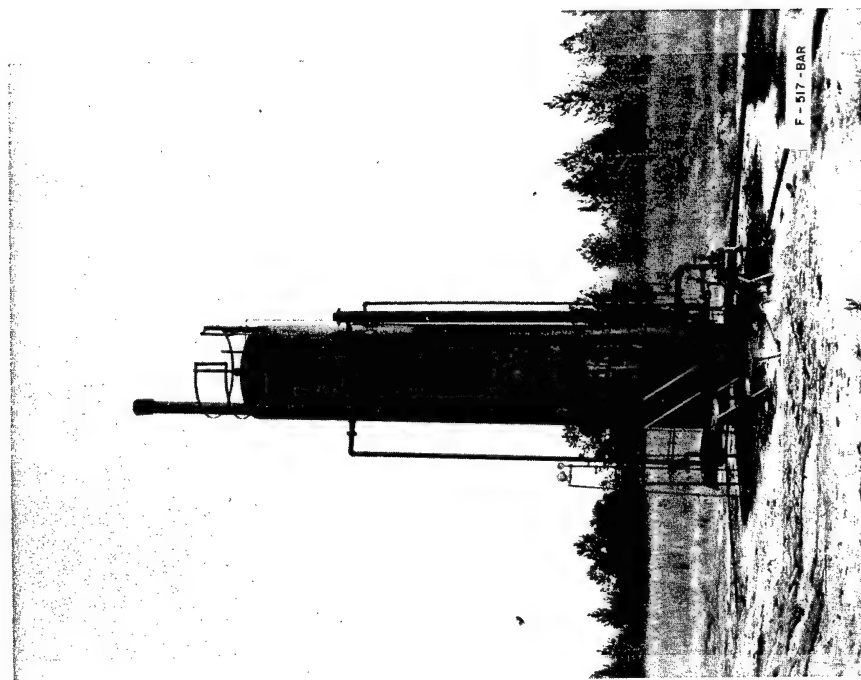


Preshot

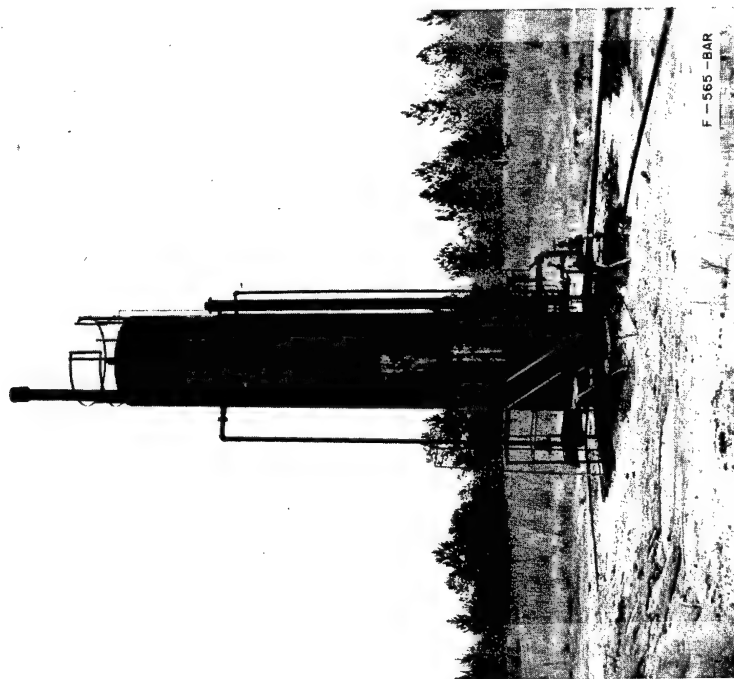

Postshot

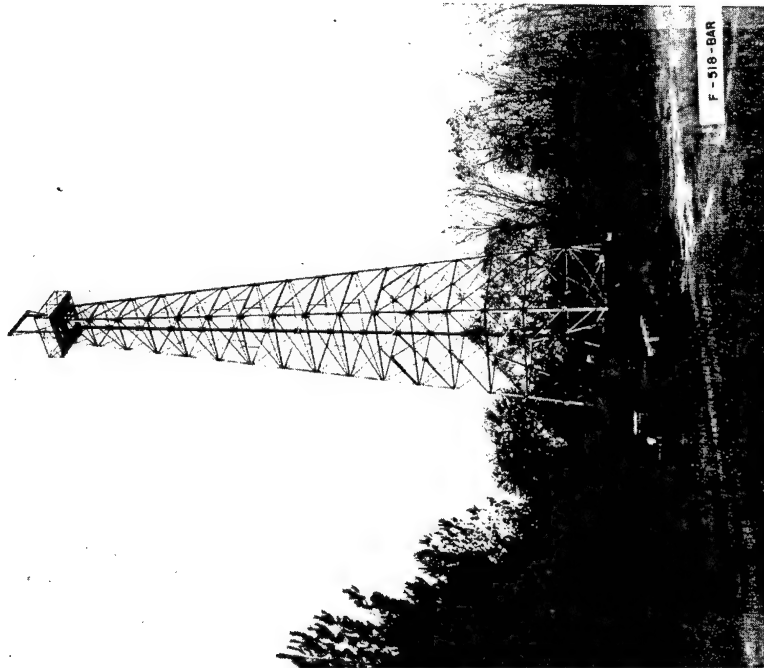


Preshot

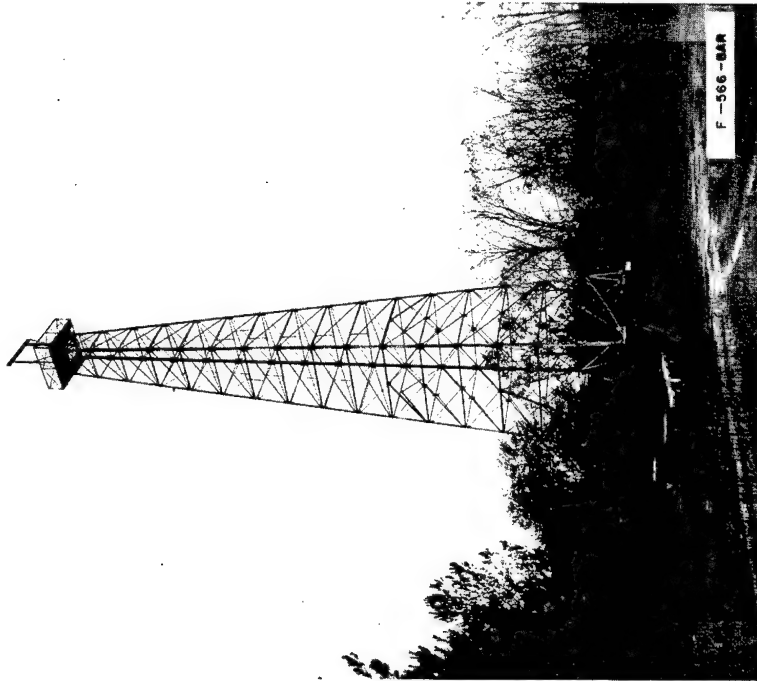


Postshot


Plate 38

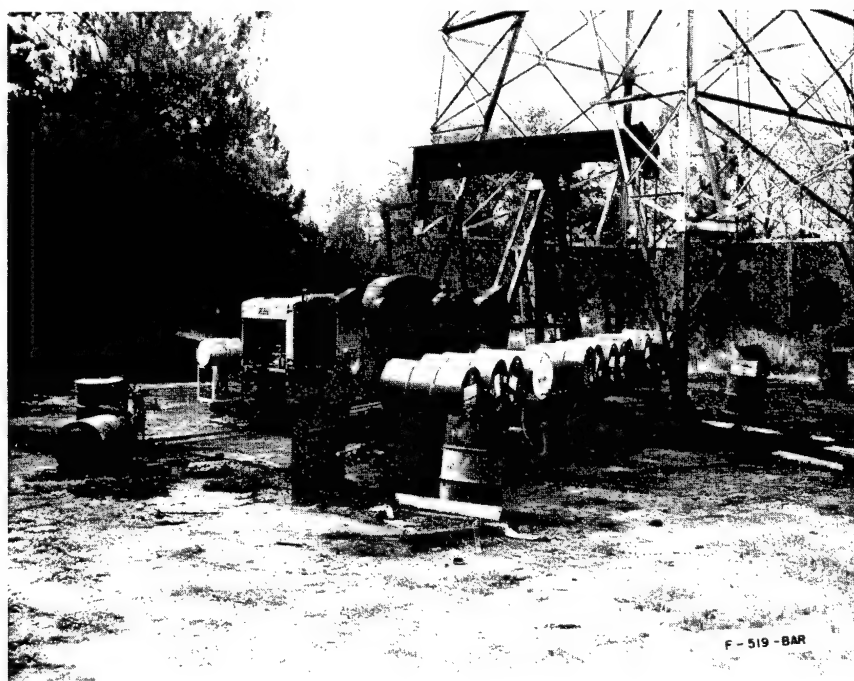


Preshot

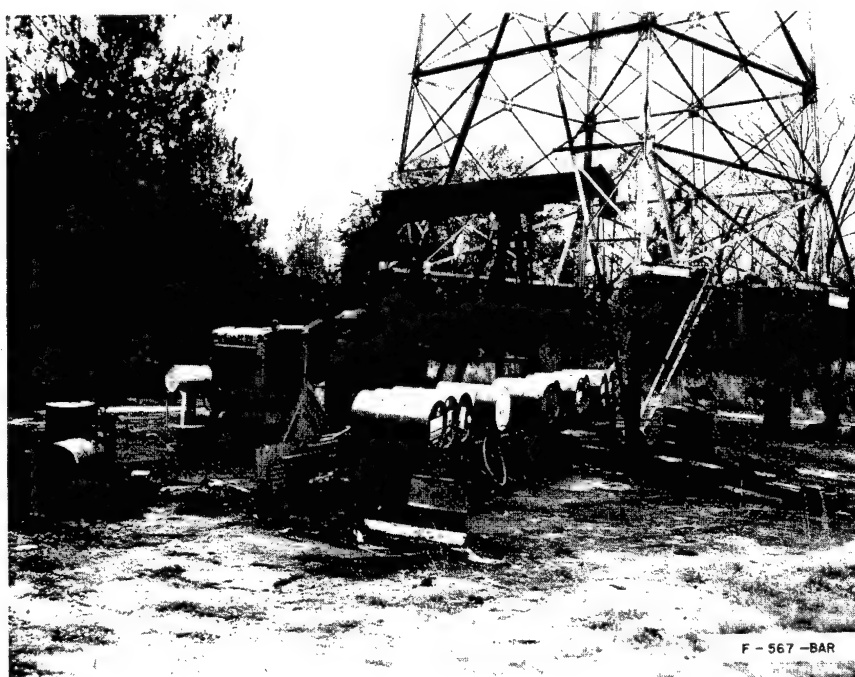

Postshot

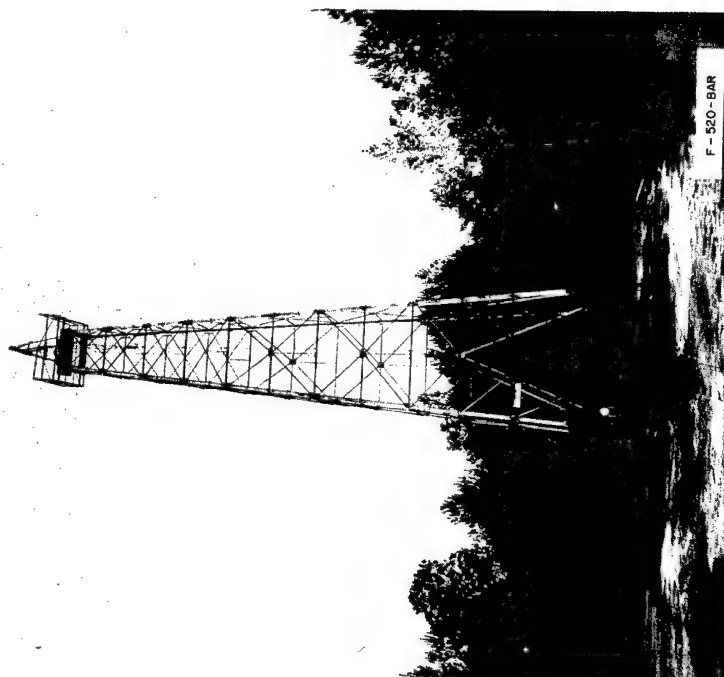


Preshot

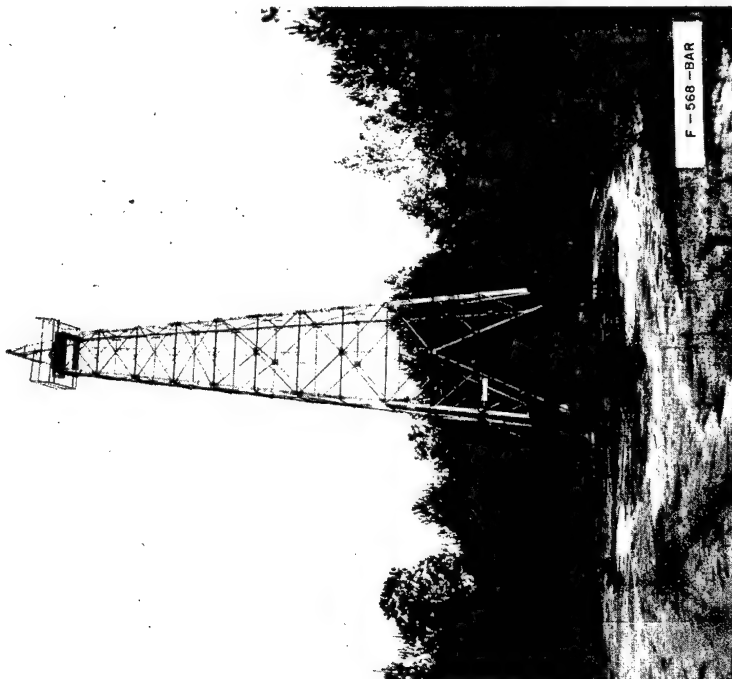

Postshot

Plate 40

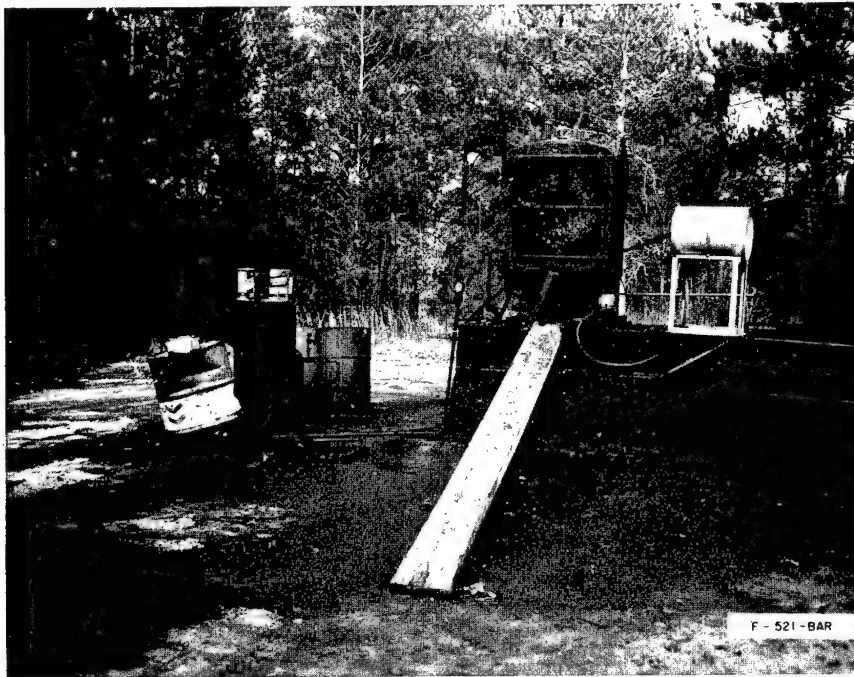


Preshot




Postshot

Plate 41

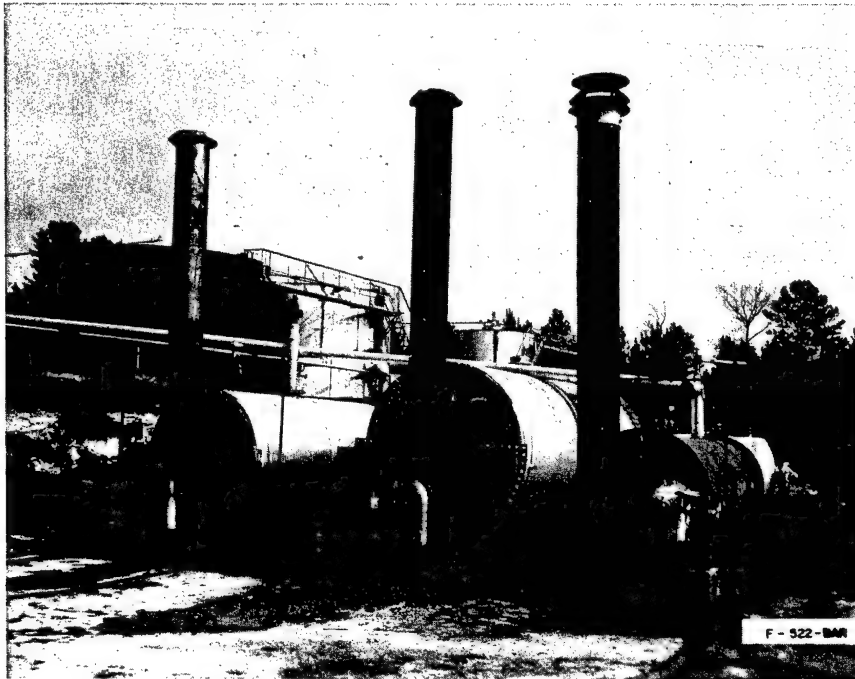


Preshot

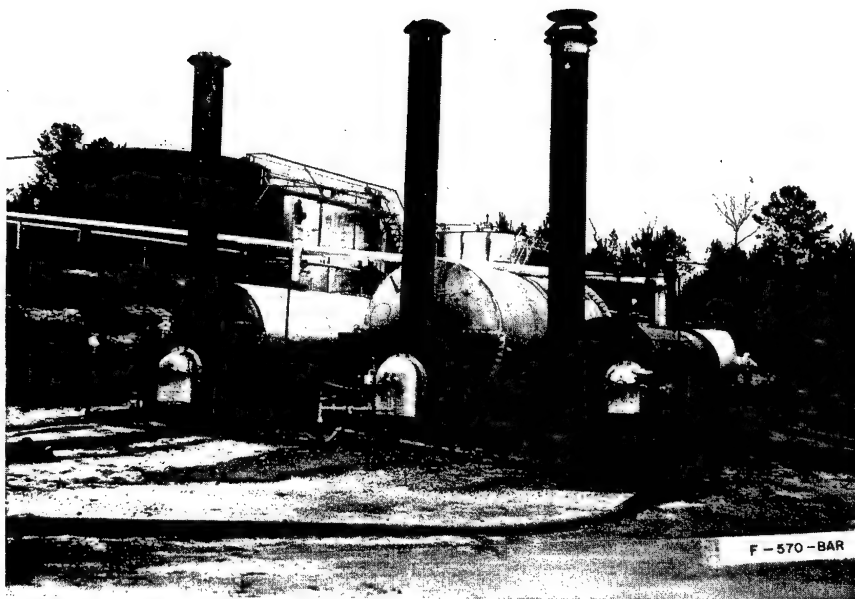


Postshot

Plate 42

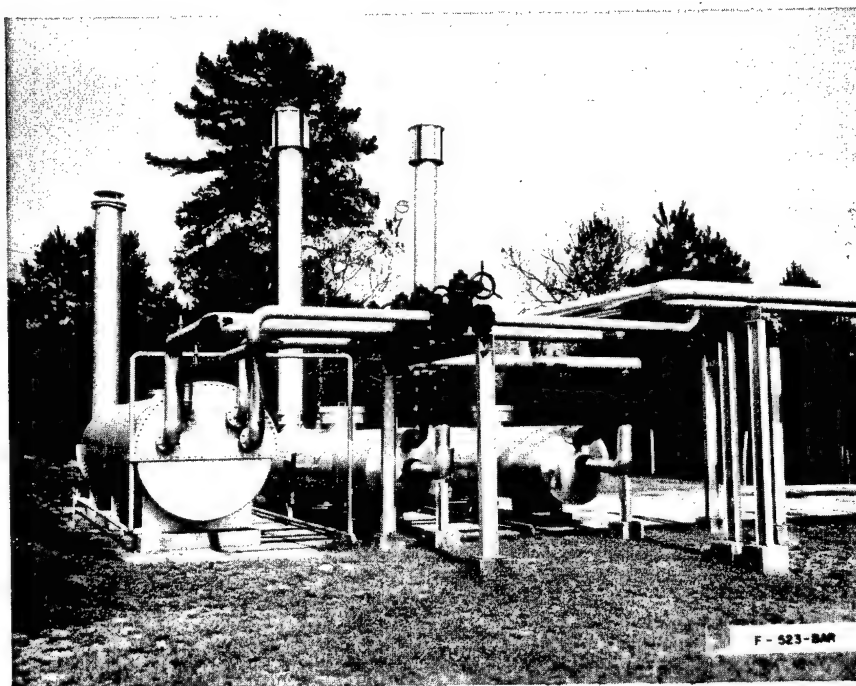


Preshot

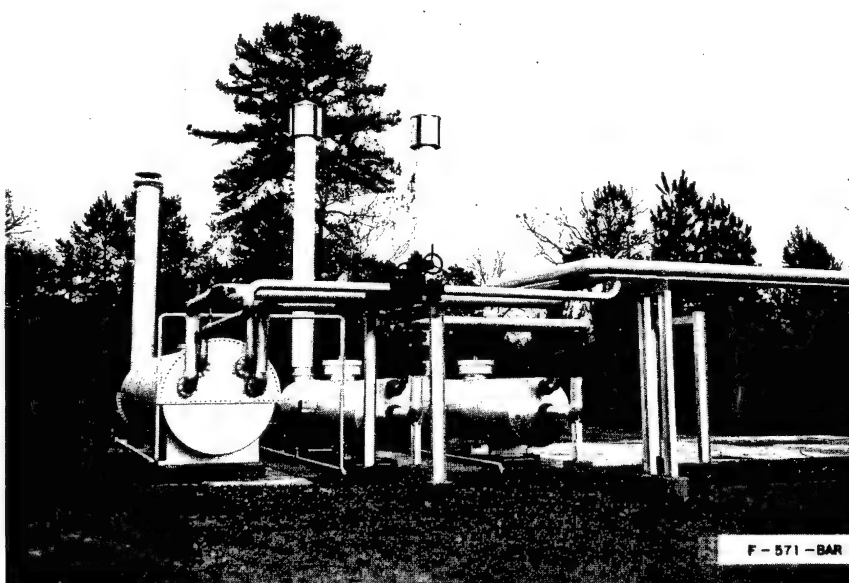


Postshot


Plate 43

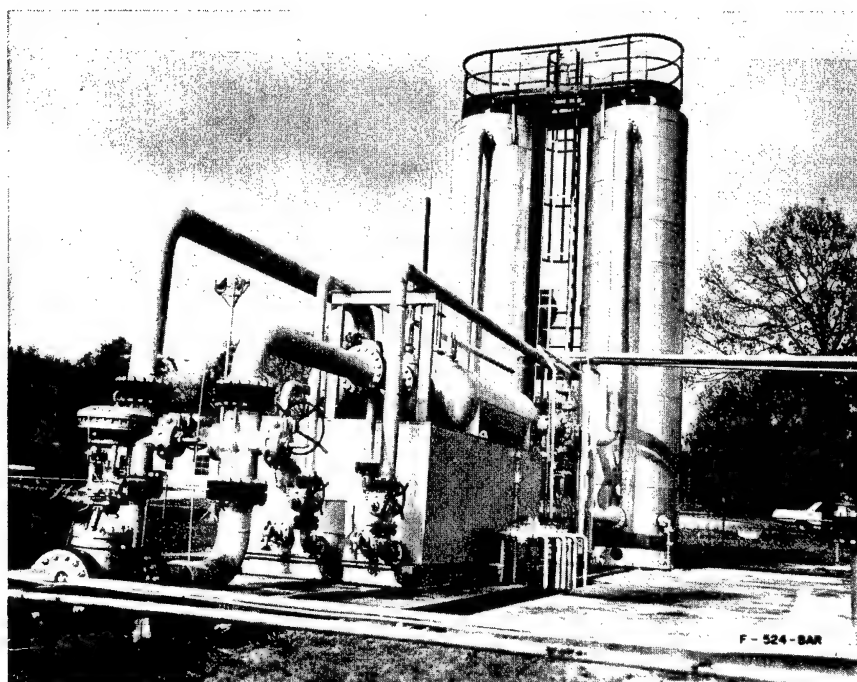


Preshot

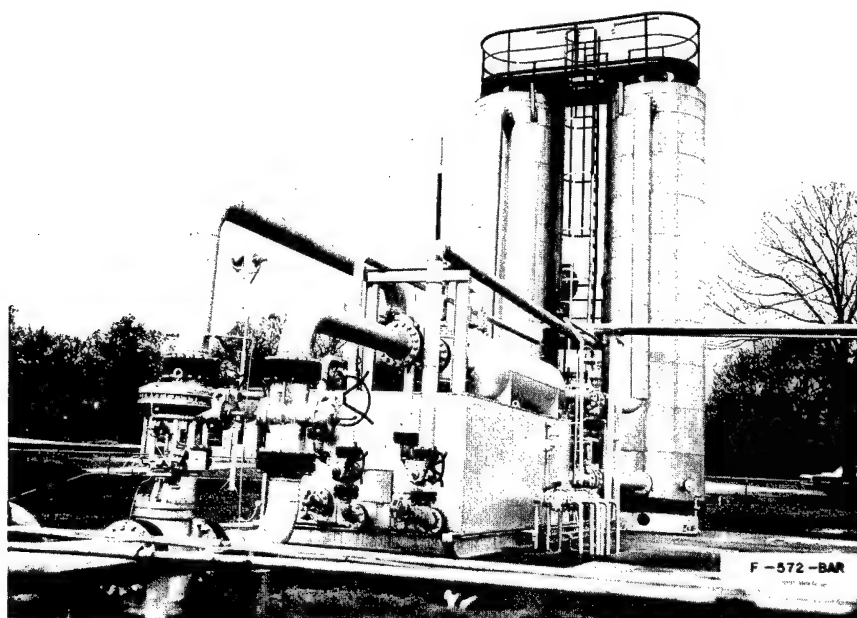


Postshot

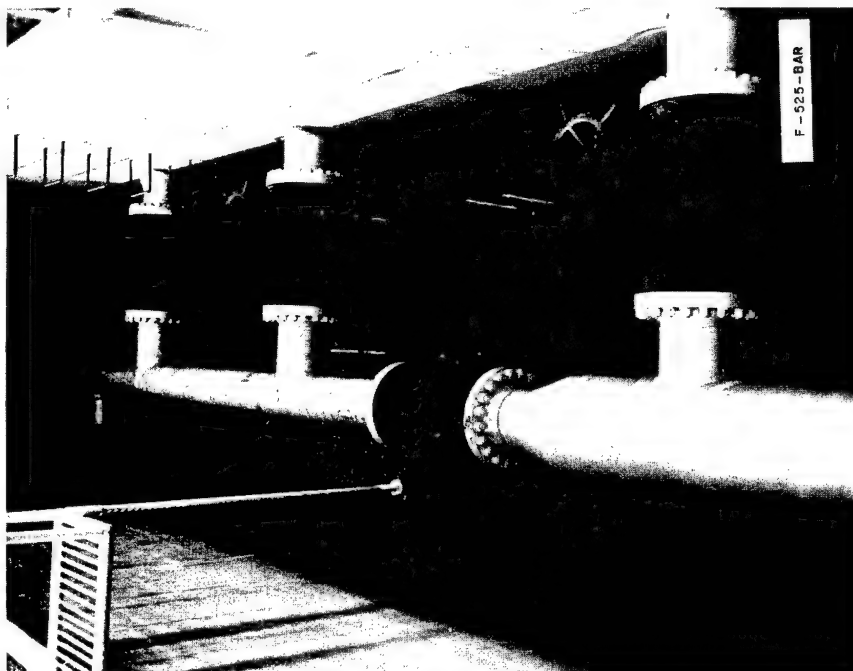


Preshot

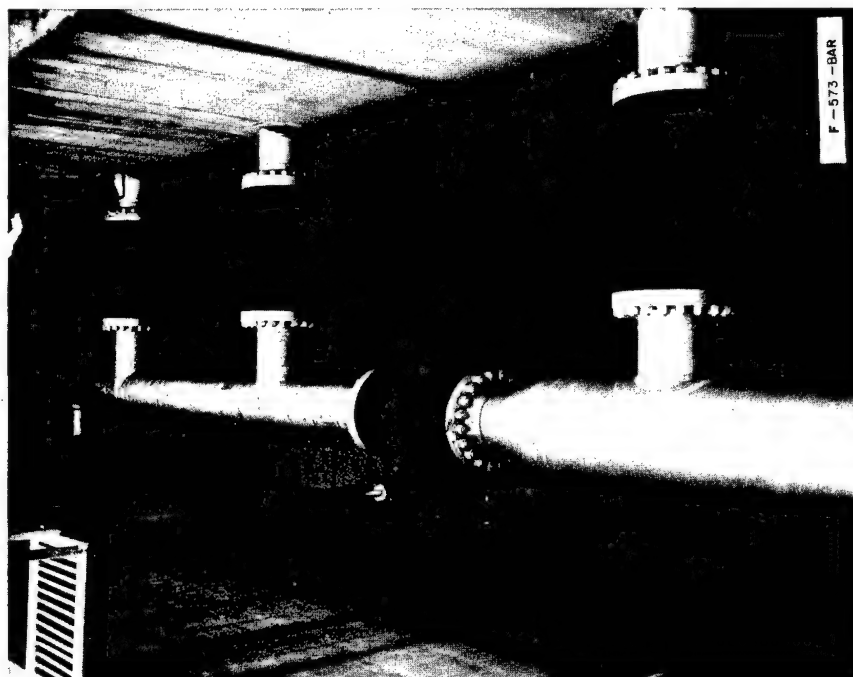

Postshot

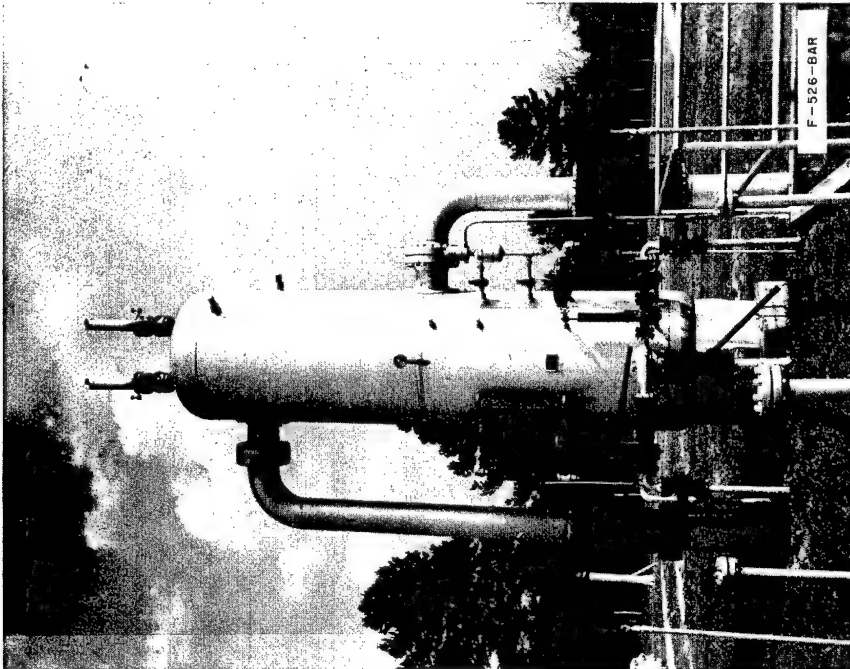


Preshot

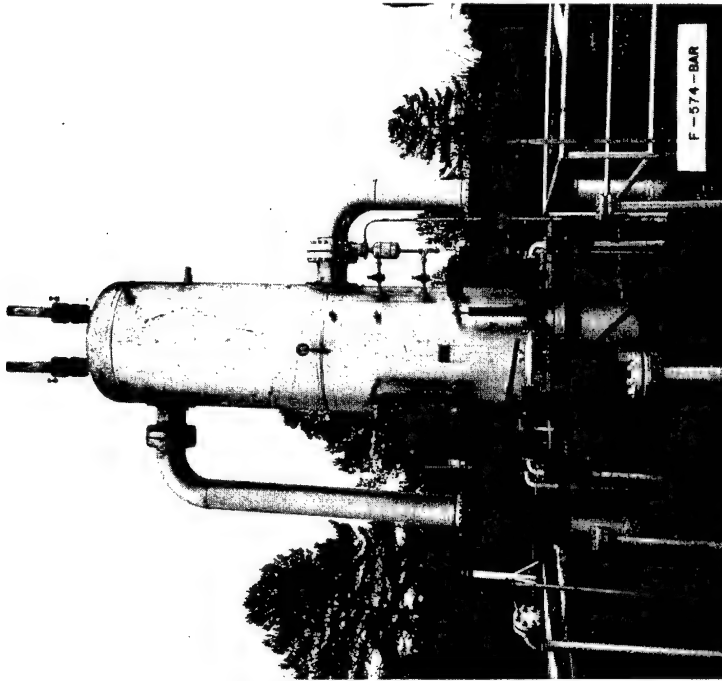


Postshot

Plate 46

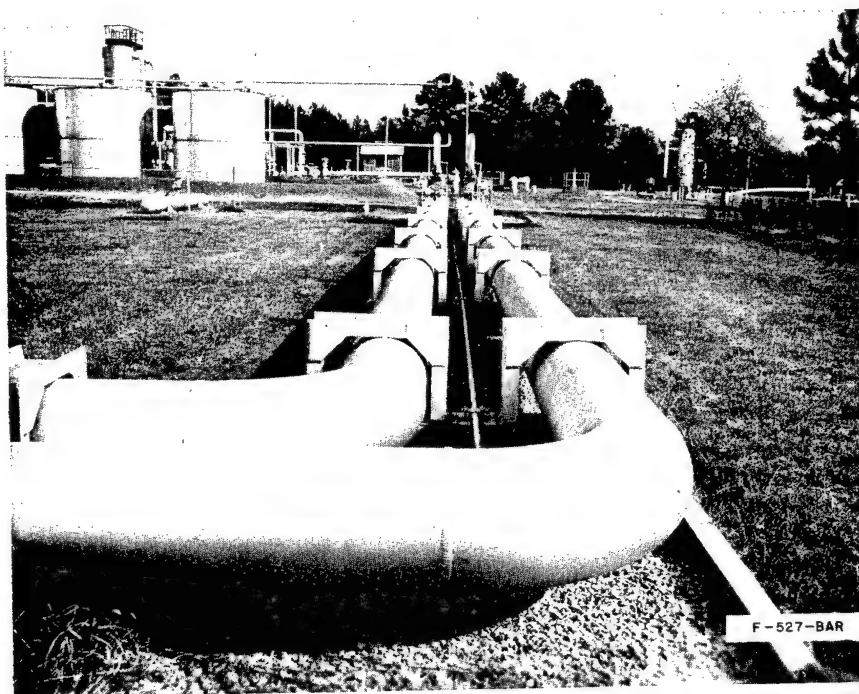


Preshot

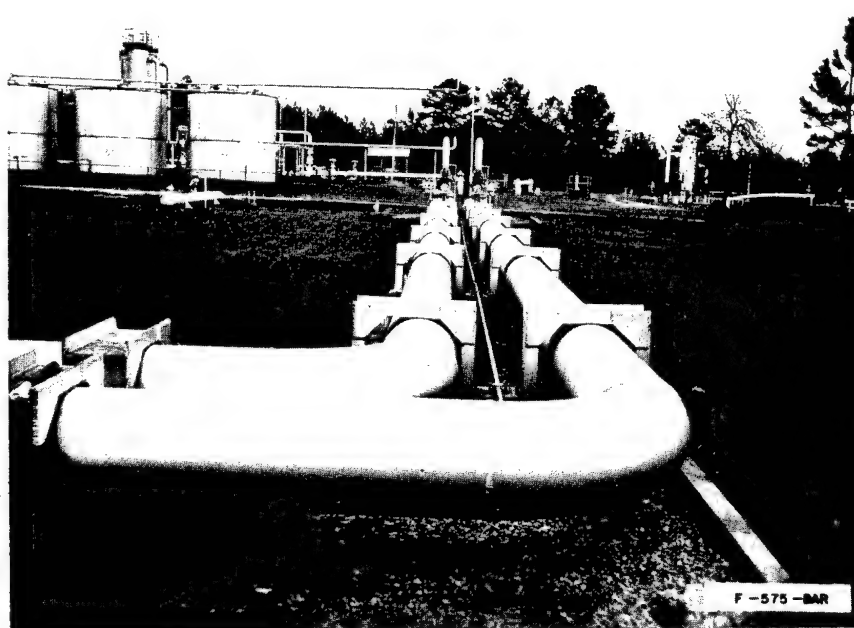


Postshot

Plate 47

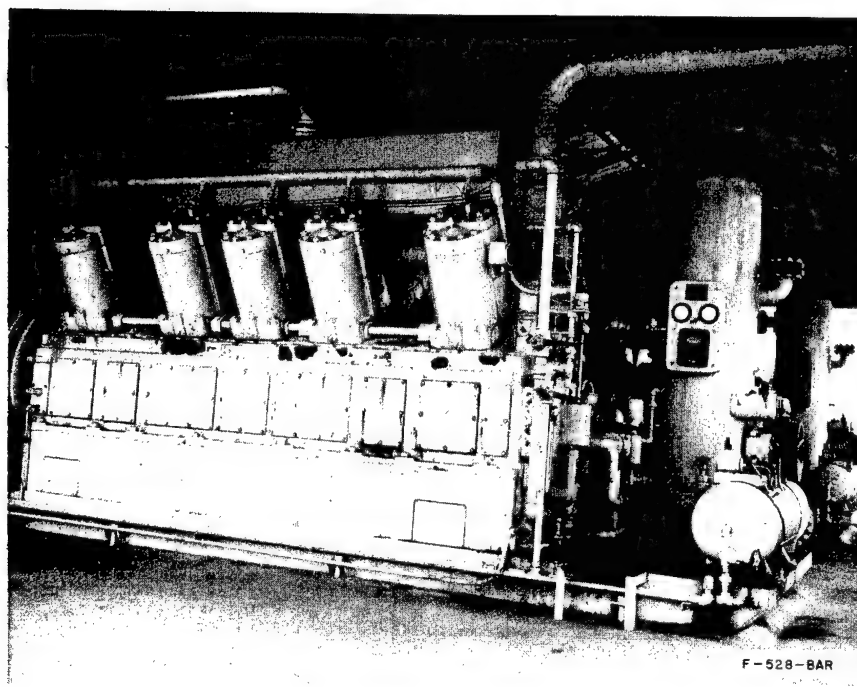

Preshot

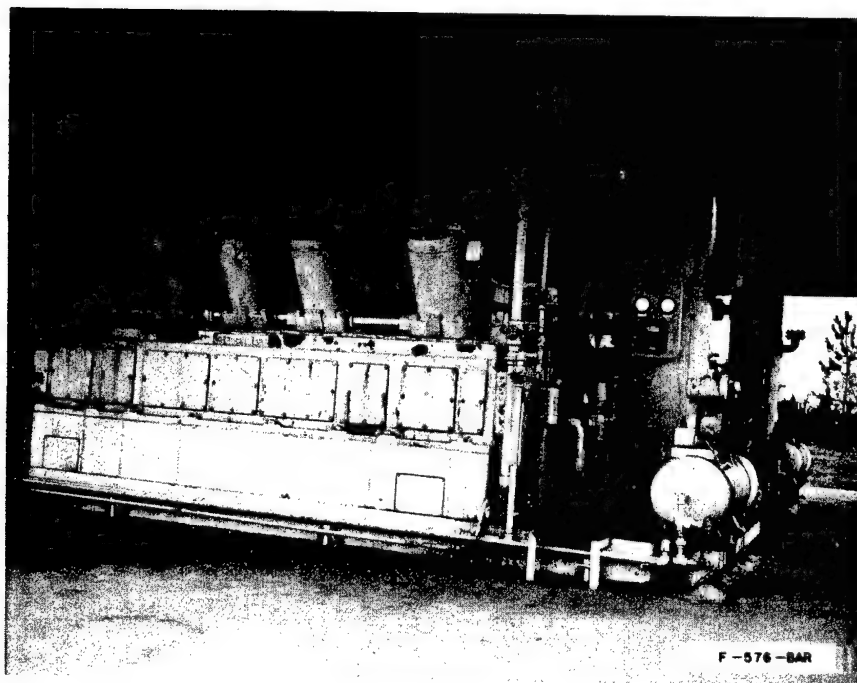

Postshot

Plate 48



Preshot



Postshot

PROJECT STERLING REPORTS

SAFETY REPORTS

<u>Report No.</u>	<u>Agency</u>	<u>Title</u>
ERC	VUF-1035	Analyses of Ground Motion and Containment
USPHS	VUF-1036	Off-Site Surveillance
ESSA/ARFRO	VUF-1037	Weather & Radiation Predictions
REECo	VUF-1038	On-Site Health and Safety
FAA	VUF-1039	Federal Aviation Agency Airspace Advisory
H-NSC	VUF-1040	Hydrologic Safety Evaluation
USBM	VUF-1041	Pre- and Post-Shot Safety Inspections of Oil and Gas Facilities
USGS	VUF-1042	Well Aquifer Response to the Sterling Event, Tatum Dome
USGS	VUF-1043	Chemical and Radio-Chemical Quality of Water Following the Sterling Event
JAB	VUF-1044	Structural Response

TECHNICAL REPORTS

LRL, SC	VUF-3025	Subsurface Phenomenology Measurements Near a Decoupled Nuclear Event
USC&GS USGS GEO TECH LRL	VUF-3026	Decoupling of Seismic Waves By a Shot-Generated Cavity
TI	VUF-3027	Radioactive Gas Analysis
II	VUF-3028	Detection of Radionuclides

List of Abbreviations for Technical Agencies
Participating in Project Sterling

ERC	Environmental Research Corporation Alexandria, Virginia
ESSA/ARFRO	Environmental Science Services Administration Air Resources Field Research Office Las Vegas, Nevada
FAA	Federal Aviation Agency Los Angeles, California
GEO TECH	Geotechnical Corporation Garland, Texas
H-NSC	Hazleton-Nuclear Science Corporation Palo Alto, California
II	Isotopes, Inc. Westwood, New Jersey
JAB	John A. Blume San Francisco, California
LRL	Lawrence Radiation Laboratory Livermore, California
REECo	Reynolds Electrical & Engineering Co., Inc. Las Vegas, Nevada
SC	Sandia Corporation Albuquerque, N. M.
TI	Texas Instruments, Inc. Dallas, Texas
USBM	U. S. Bureau of Mines
USC&GS	U. S. Coast & Geodetic Survey Las Vegas, Nevada
USGS	U. S. Geologic Survey Denver, Colorado
USPHS	U. S. Public Health Service Las Vegas, Nevada

DISTRIBUTION LIST
(TID-4500, Category UC-35)

No. Copies

1 AEC ALBUQUERQUE OPERATIONS OFFICE
1 AEC BETHESDA TECHNICAL LIBRARY
25 AEC DIVISION OF PEACEFUL NUCLEAR EXPLO-
SIVES
1 AEC LIBRARY, WASHINGTON
1 AEC MISSION TO THE IAEA
5 AEC NEVADA OPERATIONS OFFICE
1 AEC NEW YORK OPERATIONS OFFICE
1 AEC PATENT OFFICE
5 AEC SAN FRANCISCO OPERATIONS OFFICE
1 AEC SAVANNAH RIVER OPERATIONS OFFICE
1 AEC SCIENTIFIC REPRESENTATIVE, BELGIUM
1 AEC SCIENTIFIC REPRESENTATIVE, ENGLAND
1 AEC SCIENTIFIC REPRESENTATIVE, JAPAN
1 AEROSPACE CORPORATION, SAN BERNARDINO
(AF)
1 AIR FORCE AERO PROPULSION LABORATORY
(APE)
1 AIR FORCE FOREIGN TECHNOLOGY DIVISION
1 AIR FORCE INSTITUTE OF TECHNOLOGY
1 AIR FORCE SCHOOL OF AEROSPACE MEDICINE
1 AIR FORCE WEAPONS LABORATORY
1 AMES LABORATORY (AEC)
1 ARGONNE NATIONAL LABORATORY (AEC)
8 ARMY ABERDEEN PROVING GROUND
1 ARMY CHIEF OF ENGINEERS
1 ARMY ELECTRONICS COMMAND
1 ARMY ENGINEER DIVISION
5 ARMY ENGINEER NUCLEAR CRATERING GROUP
6 ARMY ENGINEER WATERWAYS EXPERIMENT
STATION
1 ARMY MATERIEL COMMAND
1 ARMY MEDICAL FIELD SERVICE SCHOOL
1 ARMY MEDICAL RESEARCH UNIT
1 ARMY MOBILITY EQUIPMENT RESEARCH AND
DEVELOPMENT CENTER
1 ARMY NUCLEAR DEFENSE LABORATORY
1 ARMY PICATINNY ARSENAL
1 ARMY ROCKY MOUNTAIN ARSENAL
1 ARMY SURGEON GENERAL
1 ARMY WALTER REED MEDICAL CENTER
1 ATOMIC POWER DEVELOPMENT ASSOCIATES, INC.
(AEC)
2 ATOMICS INTERNATIONAL (AEC)
1 BABCOCK AND WILCOX COMPANY, WASHINGTON
(AEC)
2 BATTELLE MEMORIAL INSTITUTE (AEC)
1 BATTELLE-NORTHWEST (AEC)
1 BROOKHAVEN NATIONAL LABORATORY (AEC)
2 BUREAU OF MINES, BARTLESVILLE (INT)
1 BUREAU OF MINES, DENVER (INT)
1 BUREAU OF MINES, LARAMIE (INT)
6 BUREAU OF RECLAMATION (INT)
1 DEPARTMENT OF AGRICULTURE NATIONAL
LIBRARY
1 DOD DASA LIVERMORE
1 DOD DASA RADIOBIOLOGY RESEARCH INSTITUTE
1 DOD DASA SANDIA
1 DOD DASA WASHINGTON
1 DU PONT COMPANY, AIKEN (AEC)
1 DU PONT COMPANY, WILMINGTON (AEC)
1 EG&G, INC., ALBUQUERQUE (AEC)
1 EG&G, INC., LAS VEGAS (AEC)
5 EL PASO NATURAL GAS COMPANY
8 ENVIRONMENTAL RESEARCH CORPORATION
(AEC)
1 ENVIRONMENTAL RESEARCH CORPORATION,
LAS VEGAS (AEC)
1 ENVIRONMENTAL SCIENCE SERVICES
ADMINISTRATION, LAS VEGAS (COMM.)
1 ENVIRONMENTAL SCIENCE SERVICE
ADMINISTRATION, MARYLAND (COMM.)

No. Copies

1 FRANKFORD ARSENAL (P-D LABS.)
1 GENERAL DYNAMICS/FORT WORTH (AF)
1 GENERAL ELECTRIC COMPANY, CINCINNATI
(AEC)
1 GENERAL ELECTRIC COMPANY, SAN JOSE (AEC)
1 GEOLOGICAL SURVEY, DENVER
1 GEOLOGICAL SURVEY, FLAGSTAFF (INT)
1 GEOLOGICAL SURVEY, MENLO PARK (INT)
1 GEOLOGICAL SURVEY (PECORA) (INT)
1 GULF GENERAL ATOMIC INCORPORATED (AEC)
2 HOLMES AND NARVER, INC. (AEC)
1 HUGHES AIRCRAFT COMPANY, FULLERTON
(ARMY)
1 INSTITUTE FOR DEFENSE ANALYSIS (ARMY)
1 ISOTOPES, INC. (AEC)
1 JET PROPULSION LABORATORY (NASA)
1 LAWRENCE RADIATION LABORATORY,
BERKELEY (AEC)
4 LAWRENCE RADIATION LABORATORY,
LIVERMORE (AEC)
2 LOS ALAMOS SCIENTIFIC LABORATORY (AEC)
5 LOVELACE FOUNDATION (AEC)
1 MATHEMATICA (AEC)
1 MUESER, RUTLEDGE, WENTWORTH AND
JOHNSTON (AEC)
1 MUTUAL ATOMIC ENERGY LIABILITY
UNDERWRITERS (AEC)
1 NASA JOHN F. KENNEDY SPACE CENTER
1 NATIONAL BUREAU OF STANDARDS (LIBRARY)
1 NATIONAL INSTITUTES OF HEALTH (HEW)
1 NATIONAL REACTOR TESTING STATION (INC)
(AEC)
1 NAVY ATOMIC ENERGY DIVISION
1 NAVY OFFICE OF NAVAL RESEARCH (CODE 422)
2 NAVY ORDNANCE LABORATORY
1 NAVY ORDNANCE SYSTEMS COMMAND
1 NAVY POSTGRADUATE SCHOOL
1 NAVY RADIOLOGICAL DEFENSE LABORATORY
1 NAVY SHIP SYSTEMS COMMAND HEADQUARTERS
NRA, INC.
4 OAK RIDGE NATIONAL LABORATORY (AEC)
1 OCEANOGRAPHIC SERVICES, INC. (AEC)
1 OHIO STATE UNIVERSITY (OCD)
3 PUBLIC HEALTH SERVICE, LAS VEGAS (HEW)
1 PUBLIC HEALTH SERVICE, MONTGOMERY (HEW)
1 PUBLIC HEALTH SERVICE, ROCKVILLE (HEW)
1 PUBLIC HEALTH SERVICE, WINCHESTER (HEW)
1 PUERTO RICO NUCLEAR CENTER (AEC)
1 PURDUE UNIVERSITY (AEC)
1 RADIOPTICS, INC. (AEC)
2 REYNOLDS ELECTRICAL AND ENGINEERING
COMPANY, INC. (AEC)
4 SANDIA CORPORATION, ALBUQUERQUE (AEC)
1 SANDIA CORPORATION, LIVERMORE (AEC)
1 SOUTHWEST RESEARCH INSTITUTE (AEC)
1 STANFORD UNIVERSITY (AEC)
1 TENNESSEE VALLEY AUTHORITY
1 UNION CARBIDE CORPORATION (ORGDP) (AEC)
1 UNIVERSITY OF CALIFORNIA, DAVIS,
TALLEY (AEC)
1 UNIVERSITY OF MICHIGAN (YESIAC) (ARMY)
1 UNIVERSITY OF ROCHESTER (KAPLON) (AEC)
1 UNIVERSITY OF TENNESSEE (AEC)
1 UNIVERSITY OF WASHINGTON (AEC)
1 WASHINGTON STATE UNIVERSITY (AEC)
1 WESTINGHOUSE ELECTRIC CORPORATION,
MC KENNA (AEC)
66 AEC DIVISION OF TECHNICAL INFORMATION
EXTENSION
25 CLEARINGHOUSE FOR FEDERAL SCIENTIFIC
AND TECHNICAL INFORMATION

PROJECT STERLING

DISTRIBUTION LIST

Final Technical and Safety Program Reports

Copies

ARMY

- 20 Defense Documentation Center (DDC), Cameron Station,
Alexandria, Virginia 22315, Attn: TISIA-21
"U. S. military agencies may obtain copies of this
report directly from DDC. Other qualified users
shall request through DASA."
1 Chief of Research and Development, D/A, Washington, D.C.
30210 Attn: Atomic Division
Chief of Engineers, D/A, Washington, D. C. 20310
1 Attn: ENGOW-NE
1 ENGTE-E
1 ENGMC-F
2 Commanding General, U. S. Army Materiel Command,
Washington, D. C. 20310, Attn: AMCRD-DE-N
1 Commanding General, Aberdeen Proving Ground, Aberdeen,
Maryland 21005, Attn: Director BRL
1 Director, U. S. Army Research and Development Laboratory,
Ft. Belvoir, Virginia 22060, Attn: Chief, Technical
Support Branch
1 Director, Waterways Experiment Station, U. S. Army Corps
of Engineers, Vicksburg, Mississippi 39180 Attn:
Library
1 Director, U. S. Army Corps of Engineers, Nuclear
Cratering Group, Livermore, California 94551

NAVY

- Chief of Naval Operations, Navy Department, Washington,
D. C. 20350 Attn: OP-75
1 OP-038G
1 Chief, Bureau of Yards and Docks, Navy Department,
Washington, D. C. 20370 Attn: Code D-400
1 Code D-440
1 Chief of Naval Research, Navy Department, Washington,
D. C. 20390 Attn: Code 811
1 Commanding Officer & Director, U. S. Naval Civil
Engineering Laboratory, Port Hueneme, California
93041 Attn: Code L-31
1 Commander, U. S. Naval Ordnance Laboratory, Silver Spring,
Maryland 20910 Attn: EA
1 EU
1 E
1 Director, U. S. Naval Research Laboratory, Washington,
D. C. 20390
1 U. S. Naval Radiological Defense Laboratory, San Francisco,
California 94135

AIR FORCE

- 1 Director of Research and Development, DCS/D, Hq, USAF,
Washington, D. C. 20330, Attn: Guidance & Weapons
Division
1 AFCLRL, L. C. Hanscom Field, Bedford, Massachusetts 01731
Attn: CRJW
4 AFWL, Kirtland AFB, New Mexico 87117
1 Commandant, Institute of Technology, Wright-Patterson
AFB, Ohio 45433 Attn: MCLI-ITRIDL
1 BSL, Norton AFB, California 92409
1 Director of Civil Engineering, Hq, USAF, Washington,
D. C. 20330 Attn: AFCE
1 AFOSR, Tempo Bldg. D, Washington, D. C. 20333, Attn:
SRPG

OTHERS

- 1 Director of Defense Research and Engineering, Washington,
D. C. 20330 Attn: Technical Library
1 Assistant to the Secretary of Defense (Atomic Energy),
Washington, D. C. 20330
1 Director, Weapons Systems Evaluation Group, OSD, Room
1E880, The Pentagon, Washington, D. C. 20301

Copies

- Commander, Field Command, DASA, Sandia Base, Albuquerque,
New Mexico 87115 Attn: FCWT
1 FCTG
4 Commander, Test Command, DASA, Sandia Base, Albuquerque,
New Mexico 87115
5 Chief, Defense Atomic Support Agency, Washington, D. C.
20301
1 Los Alamos Scientific Laboratory, P. O. Box 1663, Los
Alamos, New Mexico 87544 Attn: R port Librarian
(for W. E. Ogle)
1 Chief, Classified Technical Library, Technical Informa-
tion Service, U. S. Atomic Energy Commission,
Washington, D. C. 20545 (for DMA)
1 Manager, Nevada Operations Office, USAEC, Las Vegas,
Nevada 89101
1 EG&G, Inc., P. O. Box 384, Kenmore Station, Boston,
Massachusetts 02215 Attn: Mary E. Saxon,
Librarian
5 Nuclear Test Detection Office, Advanced Research
Projects Agency, Department of Defense, Washington,
D. C. 20301
5 Advanced Research Projects Agency, Department of
Defense, Washington, D. C. 20301 For: Rudy Black
1 Mr. Wayne Everett Hall, U. S. Geological Survey,
Division of Experimental Geology, Department of
Interior, Washington, D. C. 20241
2 Mr. Charles R. Gellner, U. S. Arms Control & Disarma-
ment Agency, Department of State, Washington, D. C.
20301
1 Institute for Defense Analysis, 1825 Connecticut Avenue
NW., Washington, D. C. 20019 Attn: Al Rubinstein
1 Shell Development Company, P. O. Box 481, Houston, Texas
77001 Attn: Dr. Sidney Kaufman, Exploration Division
3 VELA Seismological Center, c/o Headquarters, USAF/AFTAC,
Washington, D. C. 20333
1 Lincoln Laboratories, Lexington, Massachusetts 02173
Attn: Dr. P. Green
1 VELA Seismic Information Analysis Center, University of
Michigan, P. O. Box 608, Ann Arbor, Michigan 48105
1 EG&G, Inc., Santa Barbara Laboratory, P. O. Box 98,
Goleta, California 93017 Attn: M. B. Carpenter
10 U. S. Atomic Energy Commission, Division of Technical
Information Extension, P. O. Box 62, Oak Ridge,
Tennessee 37830
1 U. S. Atomic Energy Commission, Division of Technical
Information, Washington, D. C. 20545
1 U. S. Atomic Energy Commission, Division of Operational
Safety, Washington, D. C. 20545
1 Kenneth W. King, Coast and Geodetic Survey, P. O. Box
1676, Las Vegas, Nevada 89101
1 J. C. Tison, Jr., U. S. Coast and Geodetic Survey,
Washington, D. C. 20230
1 D. C. Ward, Bureau of Mines, U. S. Department of the In-
terior, P. O. Box 1321, Bartelsville, Oklahoma 74004
2 Applied Physics Laboratory, Bureau of Mines, College
Park, Maryland 20740
1 AFTAC Element, P. O. Box 436, Mercury, Nevada 89023
2 Dr. O. A. Nance, RAND Corporation, 1700 Main Street,
Santa Monica, California 90401
3 L. C. Pakiser, U. S. Geological Survey, Bldg. 25, Federal
Center, Denver, Colorado 80225
1 Dr. C. F. Romney, Air Force Technical Applications Center,
Washington, D. C. 20333
1 J. M. Polatty, USA Corps of Engineers Waterways Experiment
Station, P. O. Drawer 2131, Jackson, Mississippi 39025
1 J. W. Allingham, U. S. Geological Survey, 8300 Colevilles
Road, Silver Spring, Maryland 20910
1 Isotopes, Inc., 123 Woodland Avenue, Westwood, New Jersey
07675
20 University of California, Lawrence Radiation Laboratory,
P. O. Box 808, Livermore, California 94551 Attn:
Technical Information Division

Plus (+) 10 copies to originating agency